

AD 680244

39

HUDSON LABORATORIES of Columbia University


145 Palisade Street, Dobbs Ferry, N. Y. 10522

Technical Report No. 154

**A CYLINDRICAL PARABOLIC REFLECTOR
FOR USE WITH PIEZOELECTRIC CYLINDRICAL
TRANSDUCERS, AS APPLIED TO LATERAL
ECHO UNDERWATER SURVEY**

by

F. W. Cole



January 1968

Document cleared for public release and sale; its distribution is unlimited.

Contract Nonr-266(84)

32

Hudson Laboratories
of
Columbia University
Dobbs Ferry, New York 10522

Technical Report No. 154

A CYLINDRICAL PARABOLIC REFLECTOR FOR USE
WITH PIEZOELECTRIC CYLINDRICAL TRANSDUCERS,
AS APPLIED TO LATERAL ECHO UNDERWATER SURVEY

by

F. W. Cole

UNCLASSIFIED

January 1968

Document cleared for public release and sale; its distribution is unlimited.

This report consists
of 37 pages.

Copy No. 89
of 145 copies.

This work was supported by the Office of Naval Research under Contract Nonr-266(84). Reproduction in whole or in part is permitted for any purpose of the United States Government.

ABSTRACT

A parabolic lead reflector designed for creating a narrow sound beam at an underwater frequency of 30.5 kHz from an array of cylindrical ceramic piezoelectric crystals is described.

The reflector consists of sheet lead 1/4-in. thick, backed by an aluminum stiffener sheet, 1/8-in. thick.

Brackets for supporting the cylindrical crystal assembly are positioned at three points along the focal axis of the reflector.

Clamping brackets for holding the cylindrical transducer are used to secure the transducer to the mounting brackets along the reflector axis. Spacers of predetermined lengths are used to position the clamping brackets closer to or further away from the mounting brackets in the reflector. In this way, the vertical beam width can be varied to a considerable degree by shifting the transducer inside, at, or forward of the reflector focal axis.

The cylindrical transducer assembly consists of 18 ceramic, lead zirconate cylinders, 1-1/2 in. O.D. and 2-1/2 in. long. The cylinders are cemented end to end to form a single, long, cylinder transducer. The transducer is then enclosed in a snug-fitting, tubular rubber sleeve that has an attached rubber oil reservoir. The entire assembly is evacuated and then filled with oil that has been previously evacuated to remove air contamination. The oil reservoir maintains pressure balance in the transducer as the transducer is raised or lowered or varies in depth during submerged towing.

INTRODUCTION

Various kinds of transducers have been employed in side-looking sonars, or lateral echo sounders. In Hudson Laboratories Model CL-1,¹ the transducer consisted of a cylindrical crystal array in front of a lead plate bent to a corner angle of 90 degrees. The shape of the sound beam was determined by positioning the center line of the transducer one wavelength from the corner and equidistant from both sides. Several experiments with the corner reflector produced results that were not as precise as desired. Accordingly, other means were used to improve the resolution capability of the cylinder transducer-reflector assembly.

Not all of the sound waves returning to a corner-reflected transducer arrive in the same phase at the transducer, but, in a parabolic reflector, they do arrive in proper phase.

The present report describes such a parabolic reflector. Construction details appear in the Appendix. The main body of this report concerns the results of directivity measurements, and presents results from experiments in the Minas Basin, Nova Scotia, and along the north coast of Jamaica, W.I., where the same areas were scanned using both corner and parabolic reflectors.

A related report will appear soon.²

¹ C. S. Clay and W. Liang, Lateral Echo Sounder - Model CL-1 (Hudson Laboratories of Columbia University Tech. Rept. No. 114, March 12, 1964).


² F. W. Cole, A Familiarization with Lateral or Side-Scanning Sonars (Hudson Laboratories of Columbia University Tech. Rept. No. 159, July 1968).

TEST RESULTS

Tests to determine the directivity patterns obtainable with the parabolic reflector transducer assembly were conducted at the U.S.N. Underwater Sound Reference Laboratory, Orlando, Florida.

Directivity patterns USRL 42416-17-18-19-20-21 and 42423 found on the following pages, with comments, indicate just a few of the possible beam patterns that can be created. USRL 42422 shows the horizontal beam pattern, which is thought to remain unchanged, regardless of the shape of the vertical pattern.


In some of the tests, USRL 42417-18-19, and 42421, a lead reflector channel was used in experiments to determine if distortion of the beam resulting from a mixing of direct radiation from the front of the transducer, and that from the reflector could be eliminated. The channel consisted of 3/16-in. thick lead formed over a 1-3/4-in. diameter round mandrel, 41-1/2 in. long. The channel was designed to cover the entire front half of the transducer when closely coupled to it. Brackets were fastened to the lead reflector channel at points agreeing with the transducer mounting clamps in the parabolic reflector (see Fig. 1).

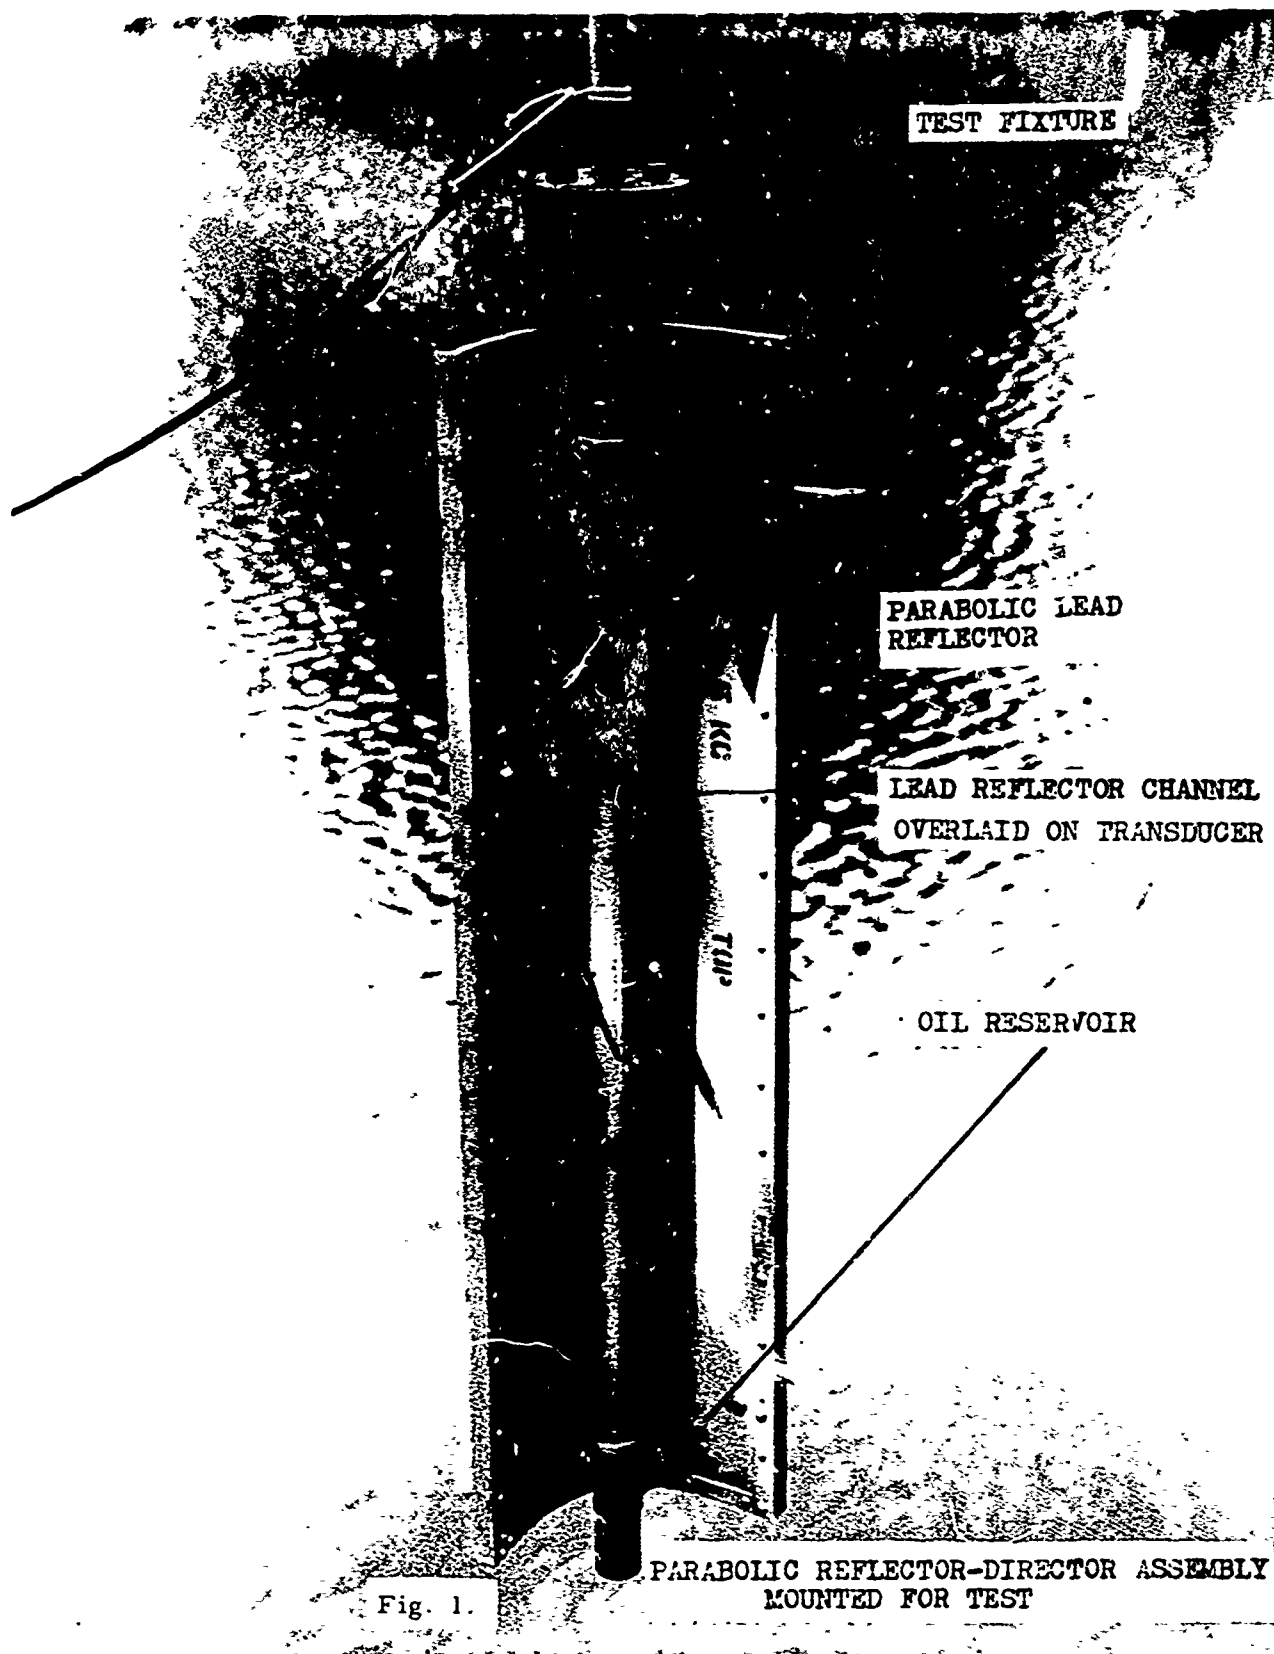

USRL 42416 (Fig. 2):

This pattern was obtained with the transducer center line located 1-15/16 in. from the reflector surface, at the design focal axis. The main lobe is approximately 25 degrees wide at the 25-dB reference line, with side lobes 18 dB down from the 10-dB reference.


This pattern has been used extensively for lateral echo survey. It results in sharp bottom definition of objects. Over uniform rubble on the bottom, comparatively uniform "shadow" generation allows the sizes of objects to be assessed.

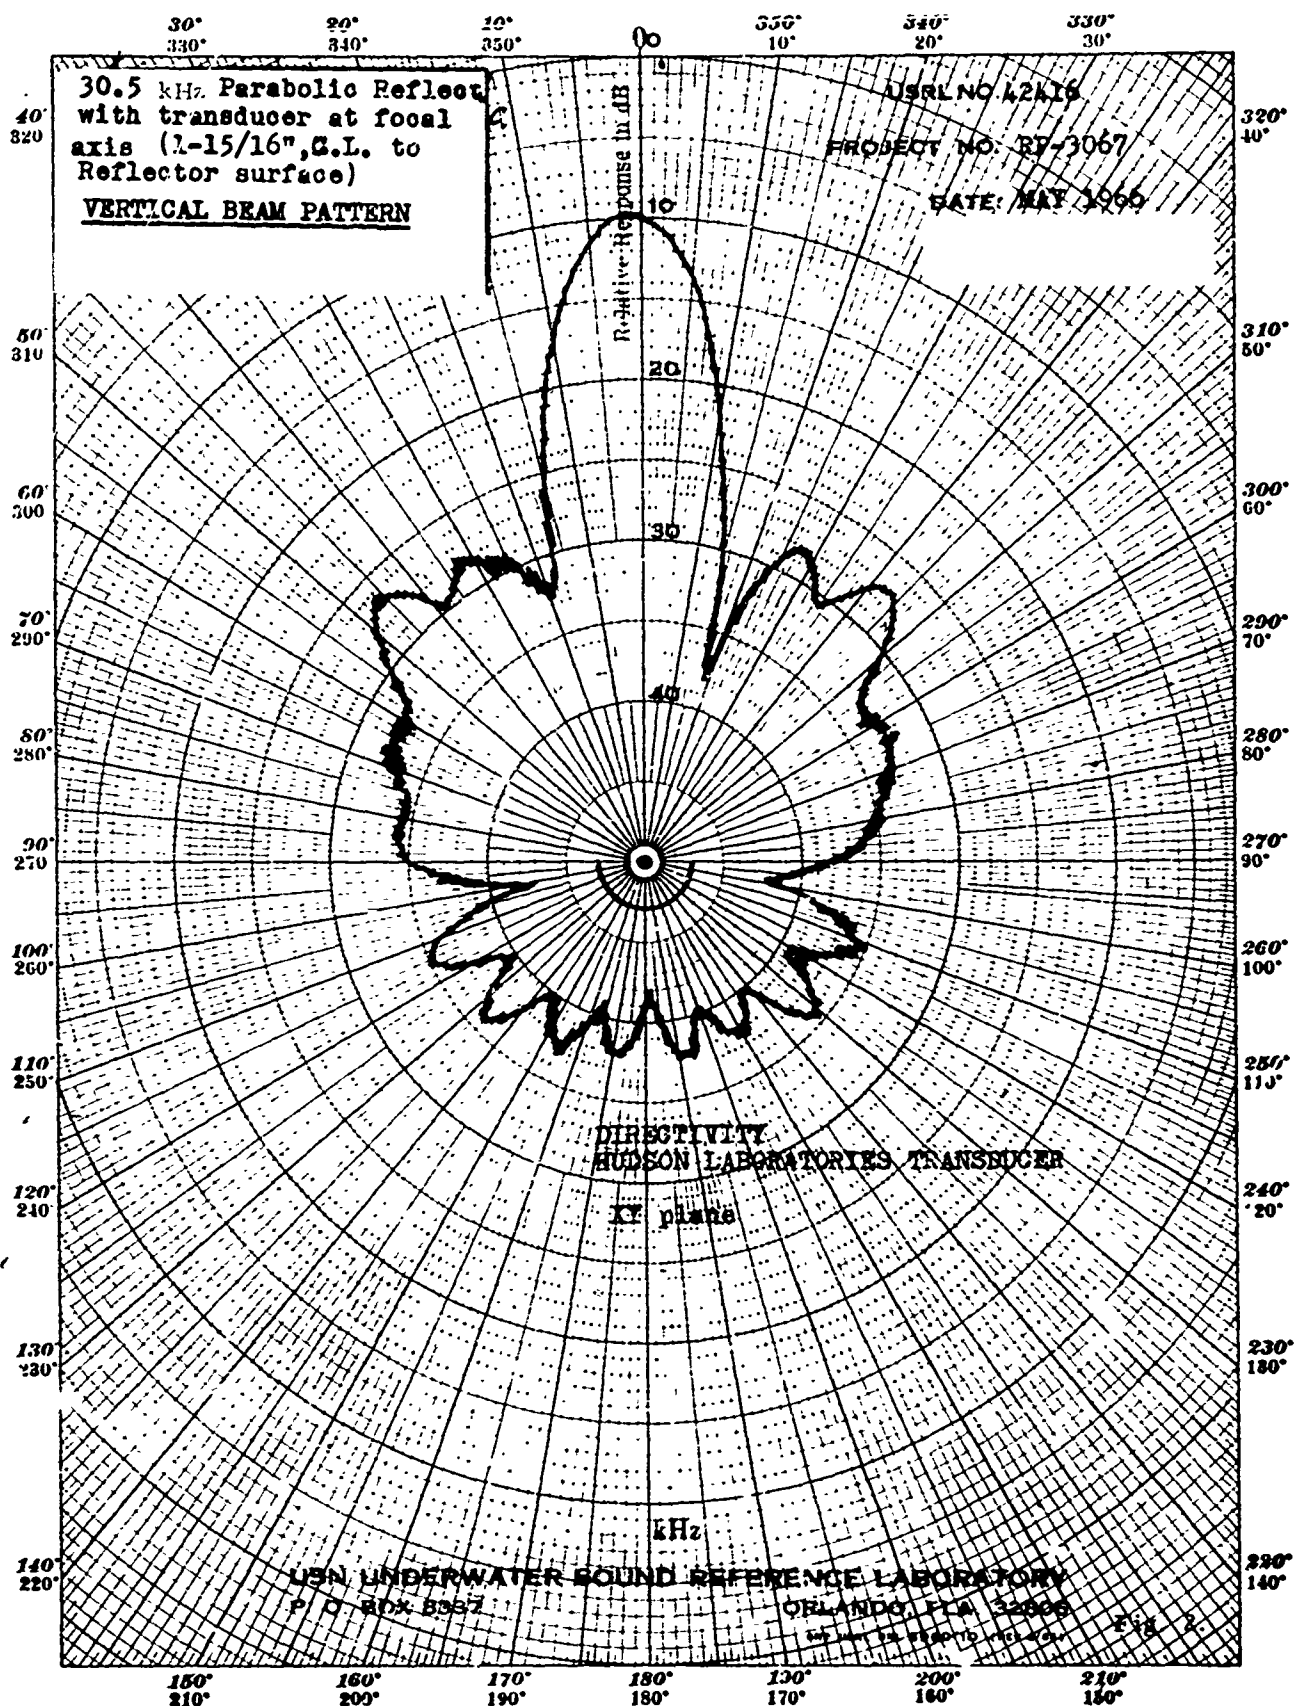

USRL 42417 (Fig. 3):


The transducer center line in this test was located the same as in USRL 42416, and the lead reflector channel was clamped against the forward transducer surface. The main lobe has been reduced to about 22 degrees at the 25-dB reference line, and the side lobes have increased in strength to only 6 dB below the 10-dB reference line.

This pattern has been used with much success in determining bottom topography. On the records, the "shifts" in spacing between the returns from each beam lobe outline gulleys, hills, and slopes. Within the area of each individual beam lobe details are clear, but in the areas between lobes, details are more difficult to observe.

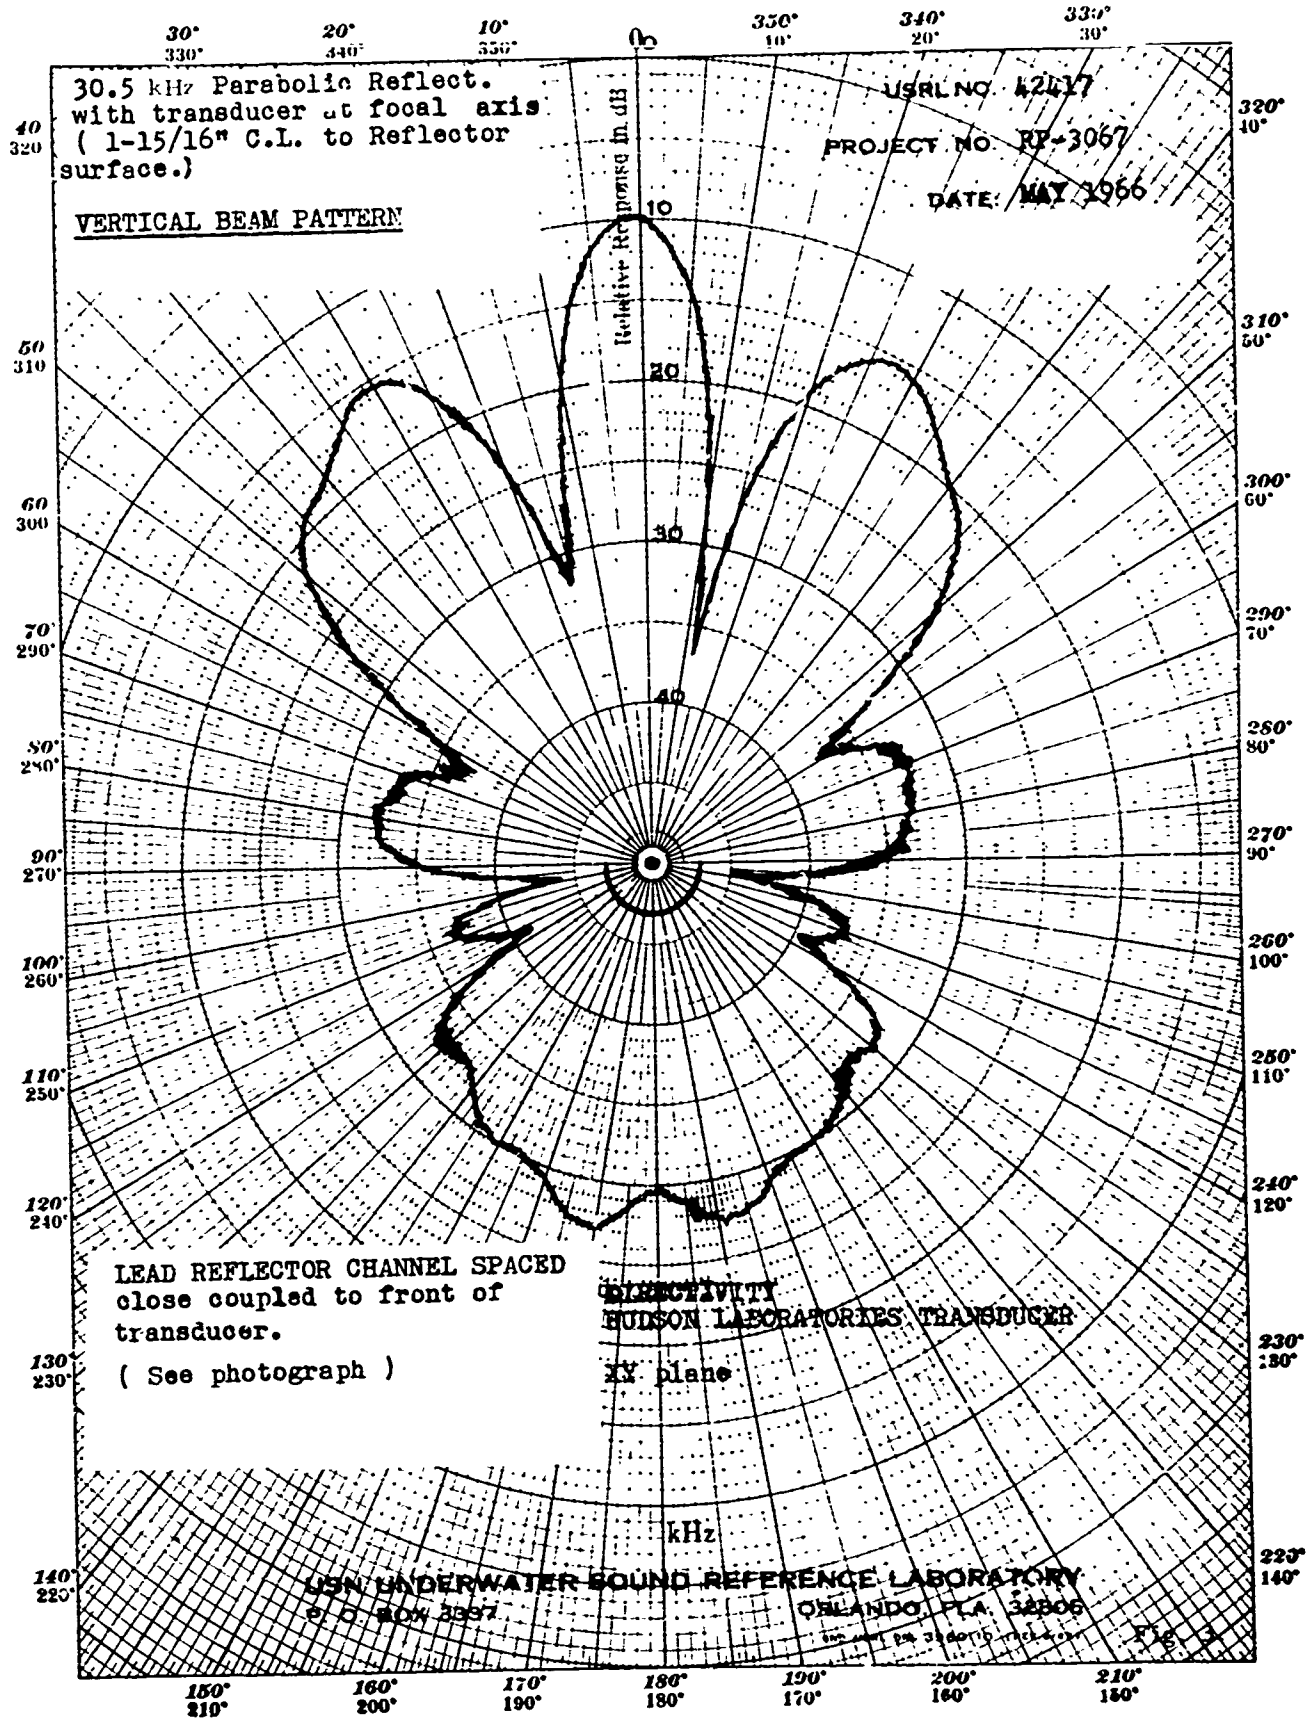


USRL 42413 (Fig. 4):

The transducer center line in this test was located the same as in USRL 42416, and the lead reflector channel was spaced 1/4 in. forward of the forward transducer surface. The main beam lobe has widened to about 65 degrees at the 25-dB reference line, and the side lobes have returned to a level about that equal to those shown in USRL 42416. This indicates that the reflector channel can be used successfully to widen the main beam substantially, without increasing the intensities of the side lobes. This beam pattern has been used extensively for bottom search work, for locating wrecks and lost aircraft.

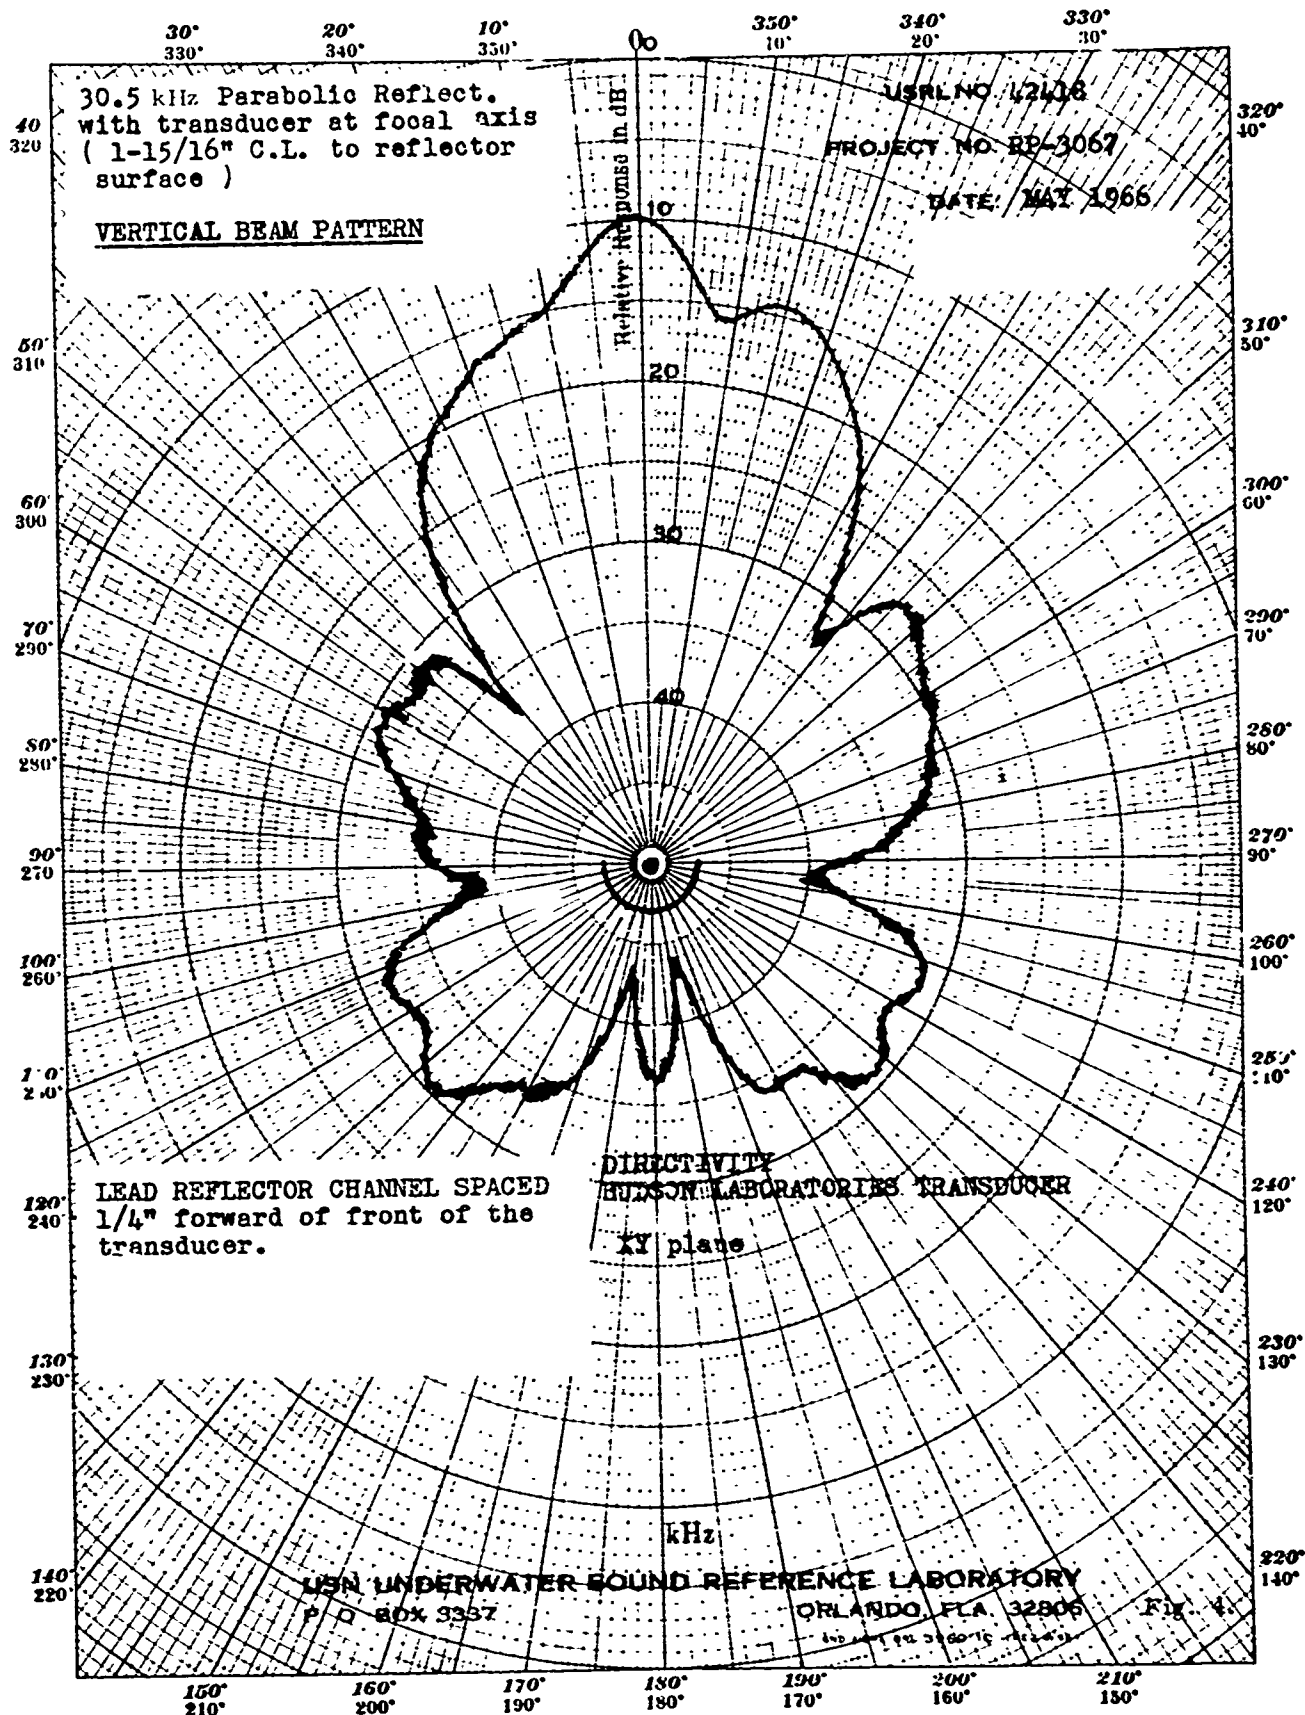


USRL 42419 (Fig. 5):

The transducer center line in this test was located the same as in USRL 42416, and the lead reflector channel was spaced $3/8$ in. forward of the forward transducer surface. The main beam lobe has spread to only about 47 degrees wide at the 25-dB reference line, and the side lobes have not greatly increased beyond that seen in USRL 42416. This indicates that the lead reflector channel need only be adjusted forward of the transducer through a comparatively small distance to narrow down the main beam lobe. Field use of this pattern produced the same results as that obtained with USRL 42418 previously shown, with the exception that the bottom area covered with this pattern was smaller in size.

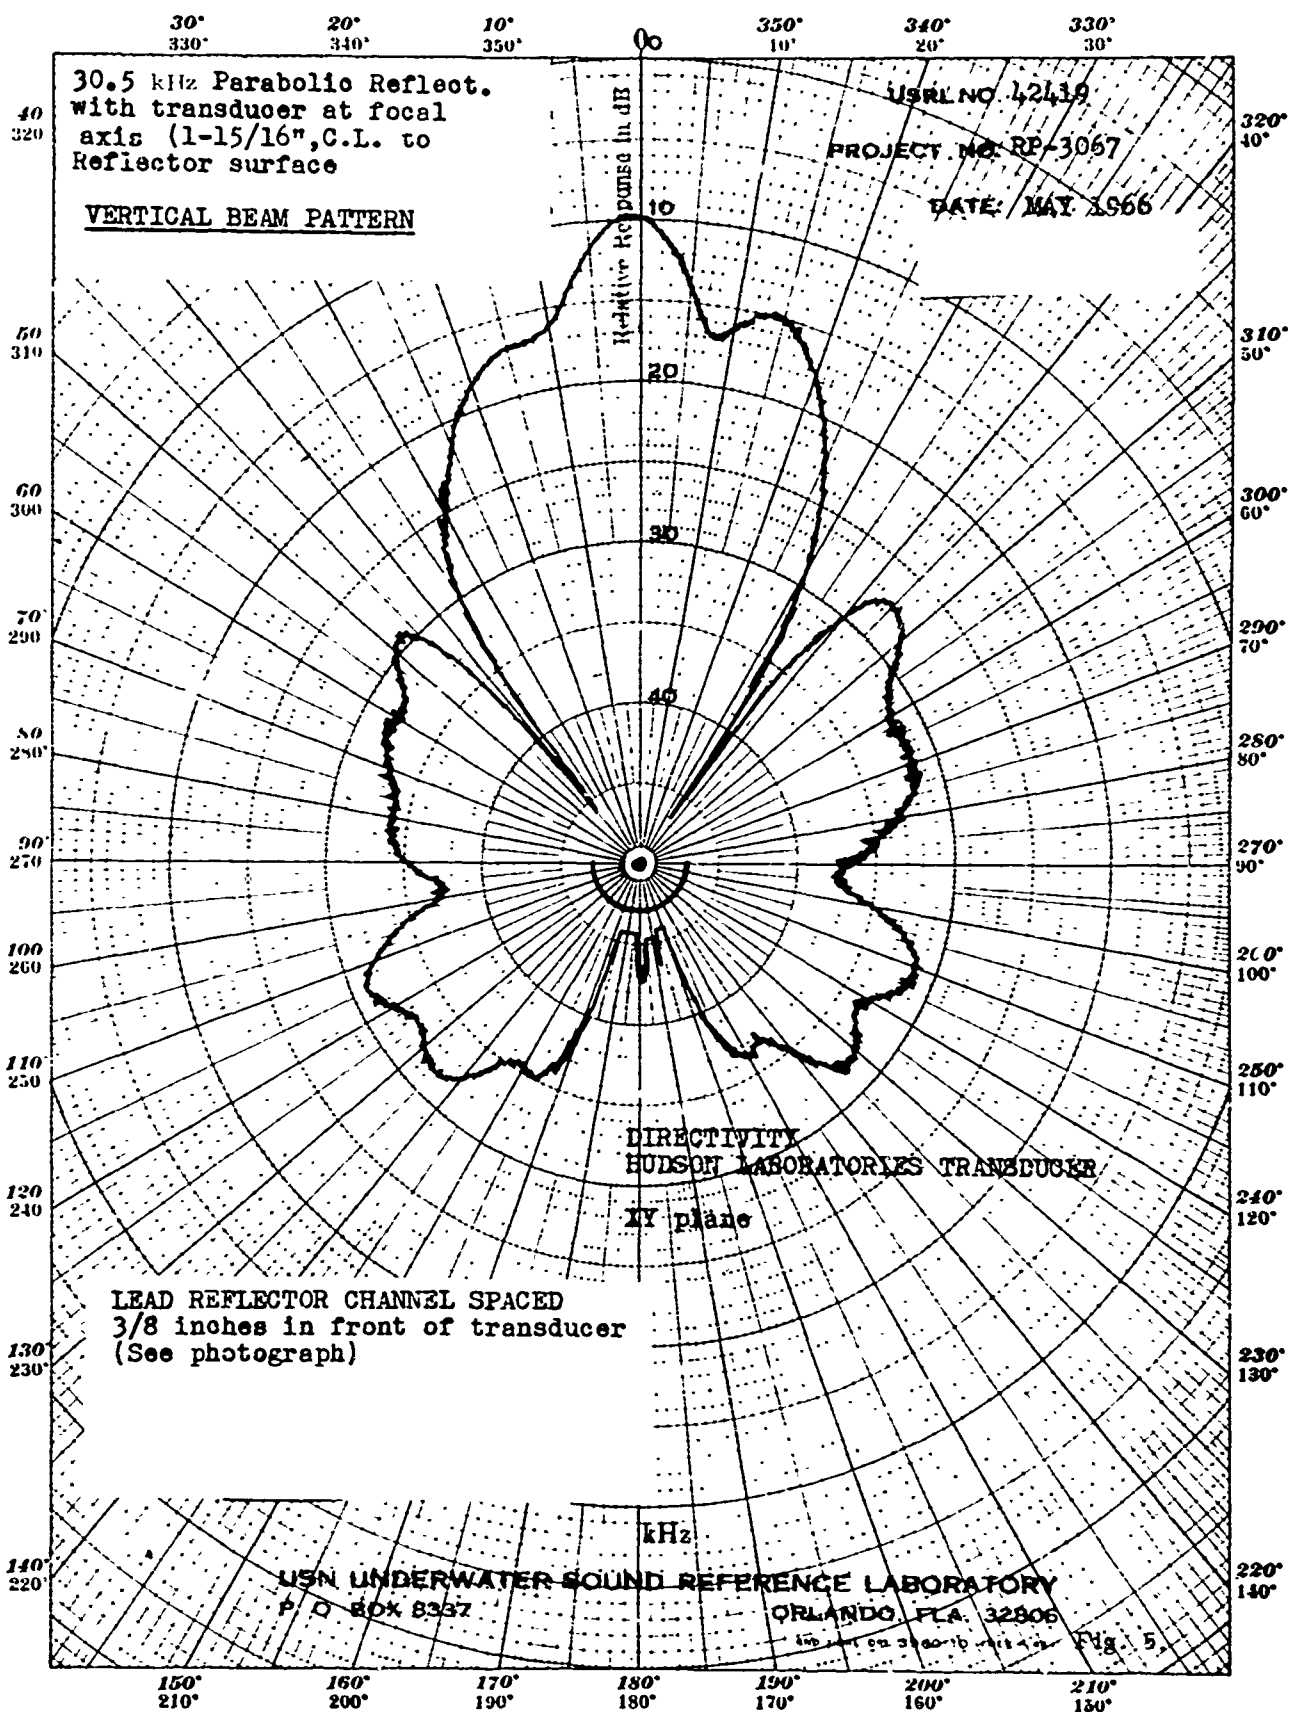


USRL 42420 (Fig. 6):

In this test the transducer center line was located $1/2$ in. behind the focal axis of the reflector, or $1-7/16$ in. from the reflector surface. The main beam lobe has been reduced to about 9 degrees at the 25-dB reference line, whereas the side lobes have been widened and raised to nearly 6 dB below the 10-dB main lobe reference. This indicates that when the transducer is positioned behind the focal axis of the reflector, the center or main lobe will be reduced, with an attendant large increase in size and strength of the side lobes. This pattern has not been used in the field.

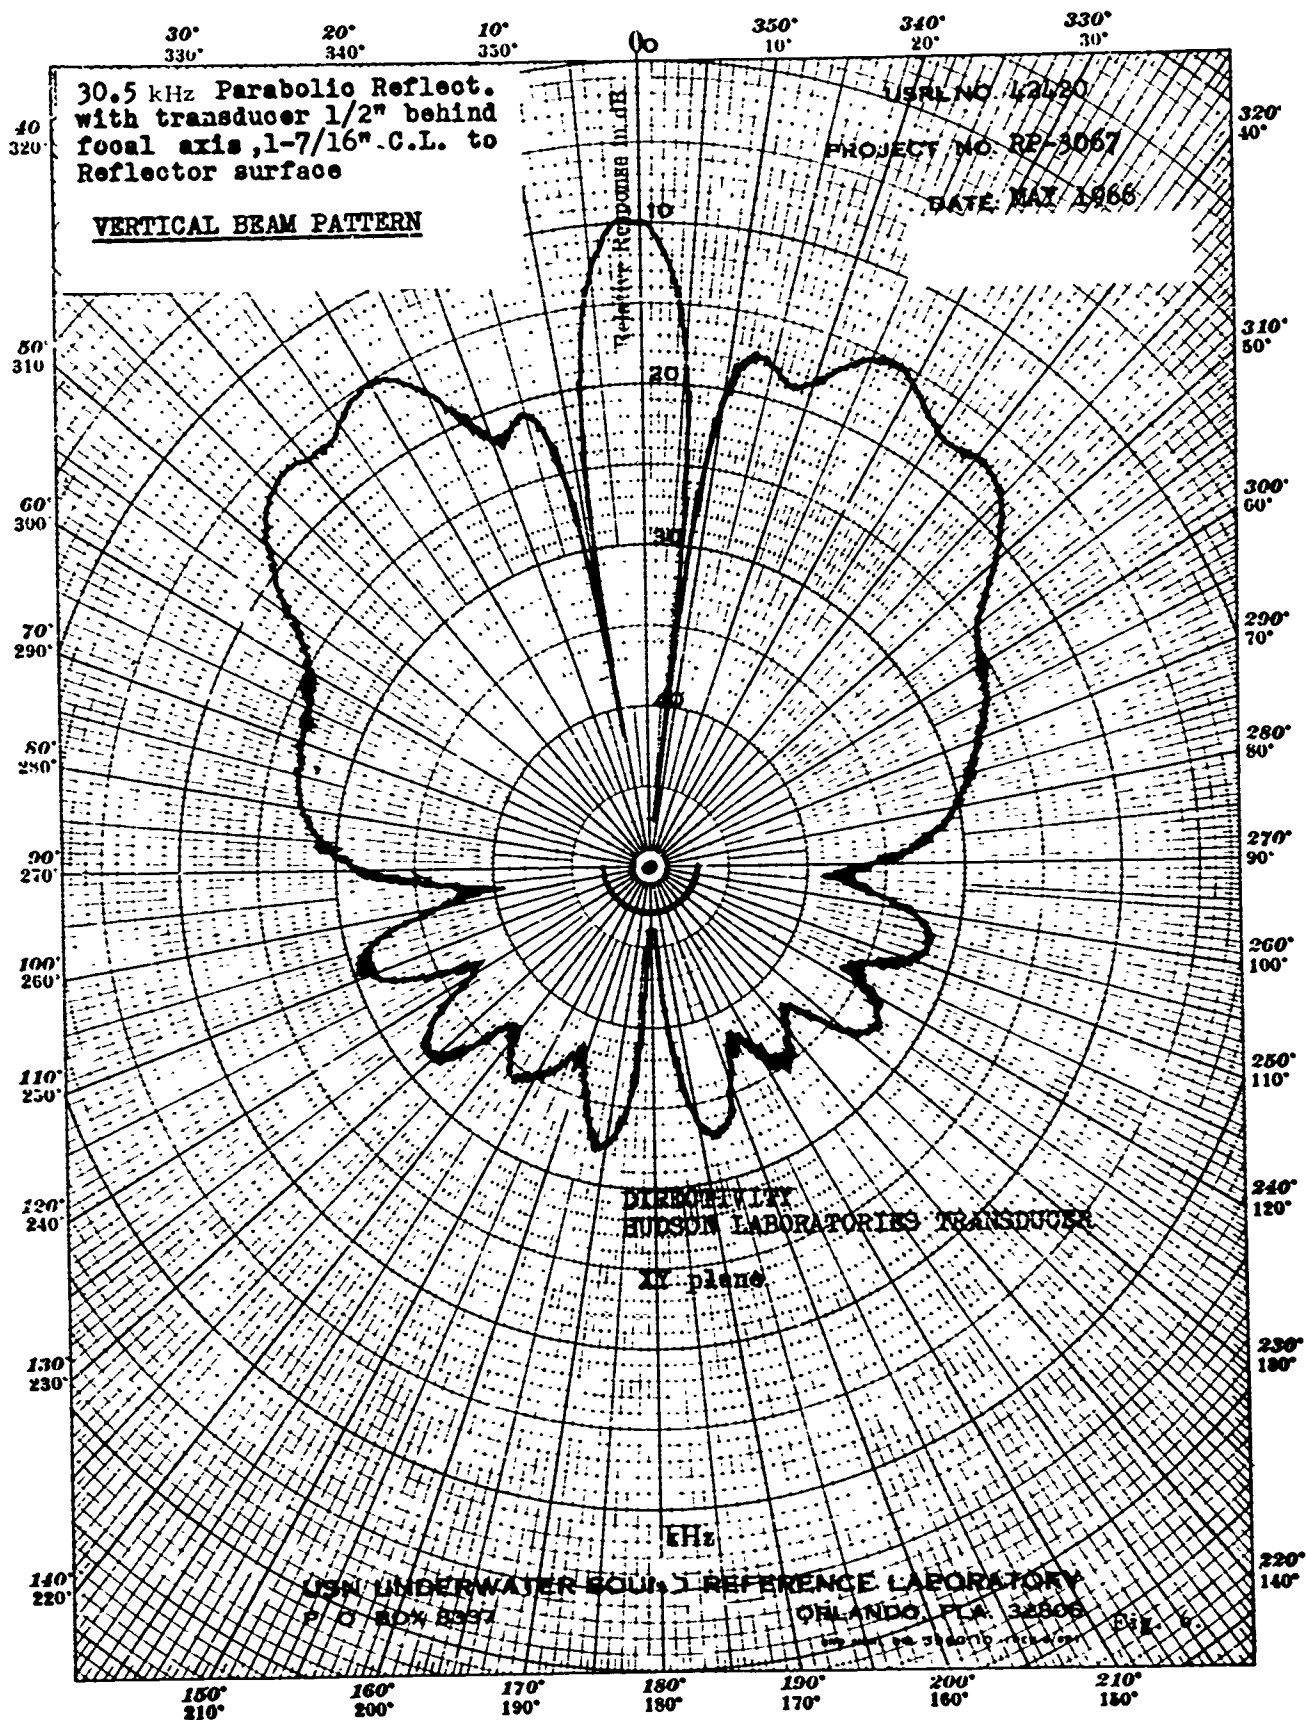


USRL 42421 (Fig. 7):

The center line of the transducer was located the same as in USRL 42420, and the lead reflector channel was clamped against the forward transducer surface. Note that the beam has been consolidated by the addition of the lead reflector channel (as compared to USRL 42420), and that the beam width is about 100 degrees at the 25-dB reference line. Side lobes of any consequence are not apparent in this pattern. Further data on this pattern are unavailable, as it has not had sufficient field use for evaluation.

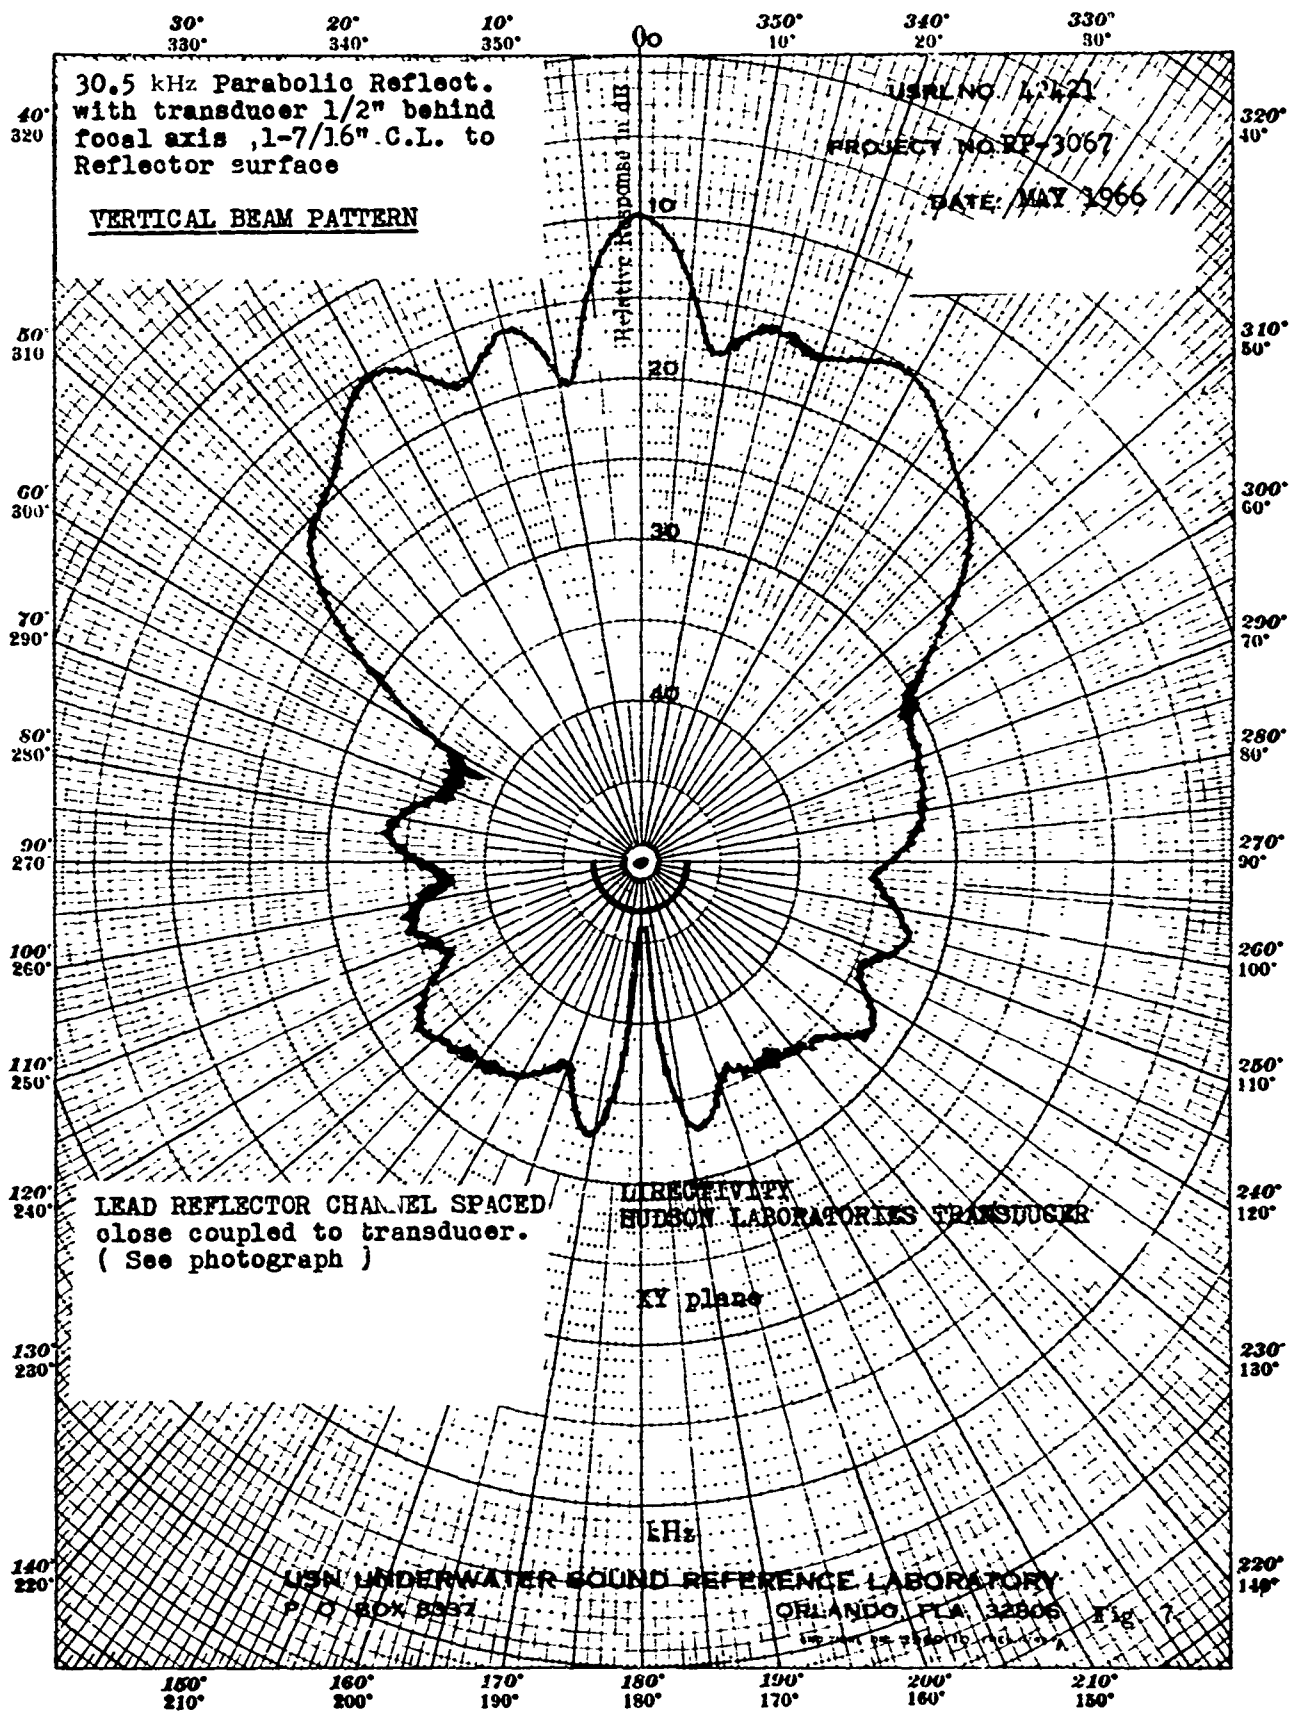


USRL 42423 (Fig. 8):

The transducer center line was located $1/4$ in. forward of the reflector focal axis, or $2-3/16$ in. from the reflector surface. The main beam lobe has expanded to about 27 degrees wide at the 25-dB reference line, but the side lobes have increased in width and increased in strength to 10 dB below the 10-dB main lobe reference line. Unfortunately, data are not available as to the effect that the lead reflector channel might have on this pattern, as test time limitations prevented further experiment. No field use of this pattern has been made.

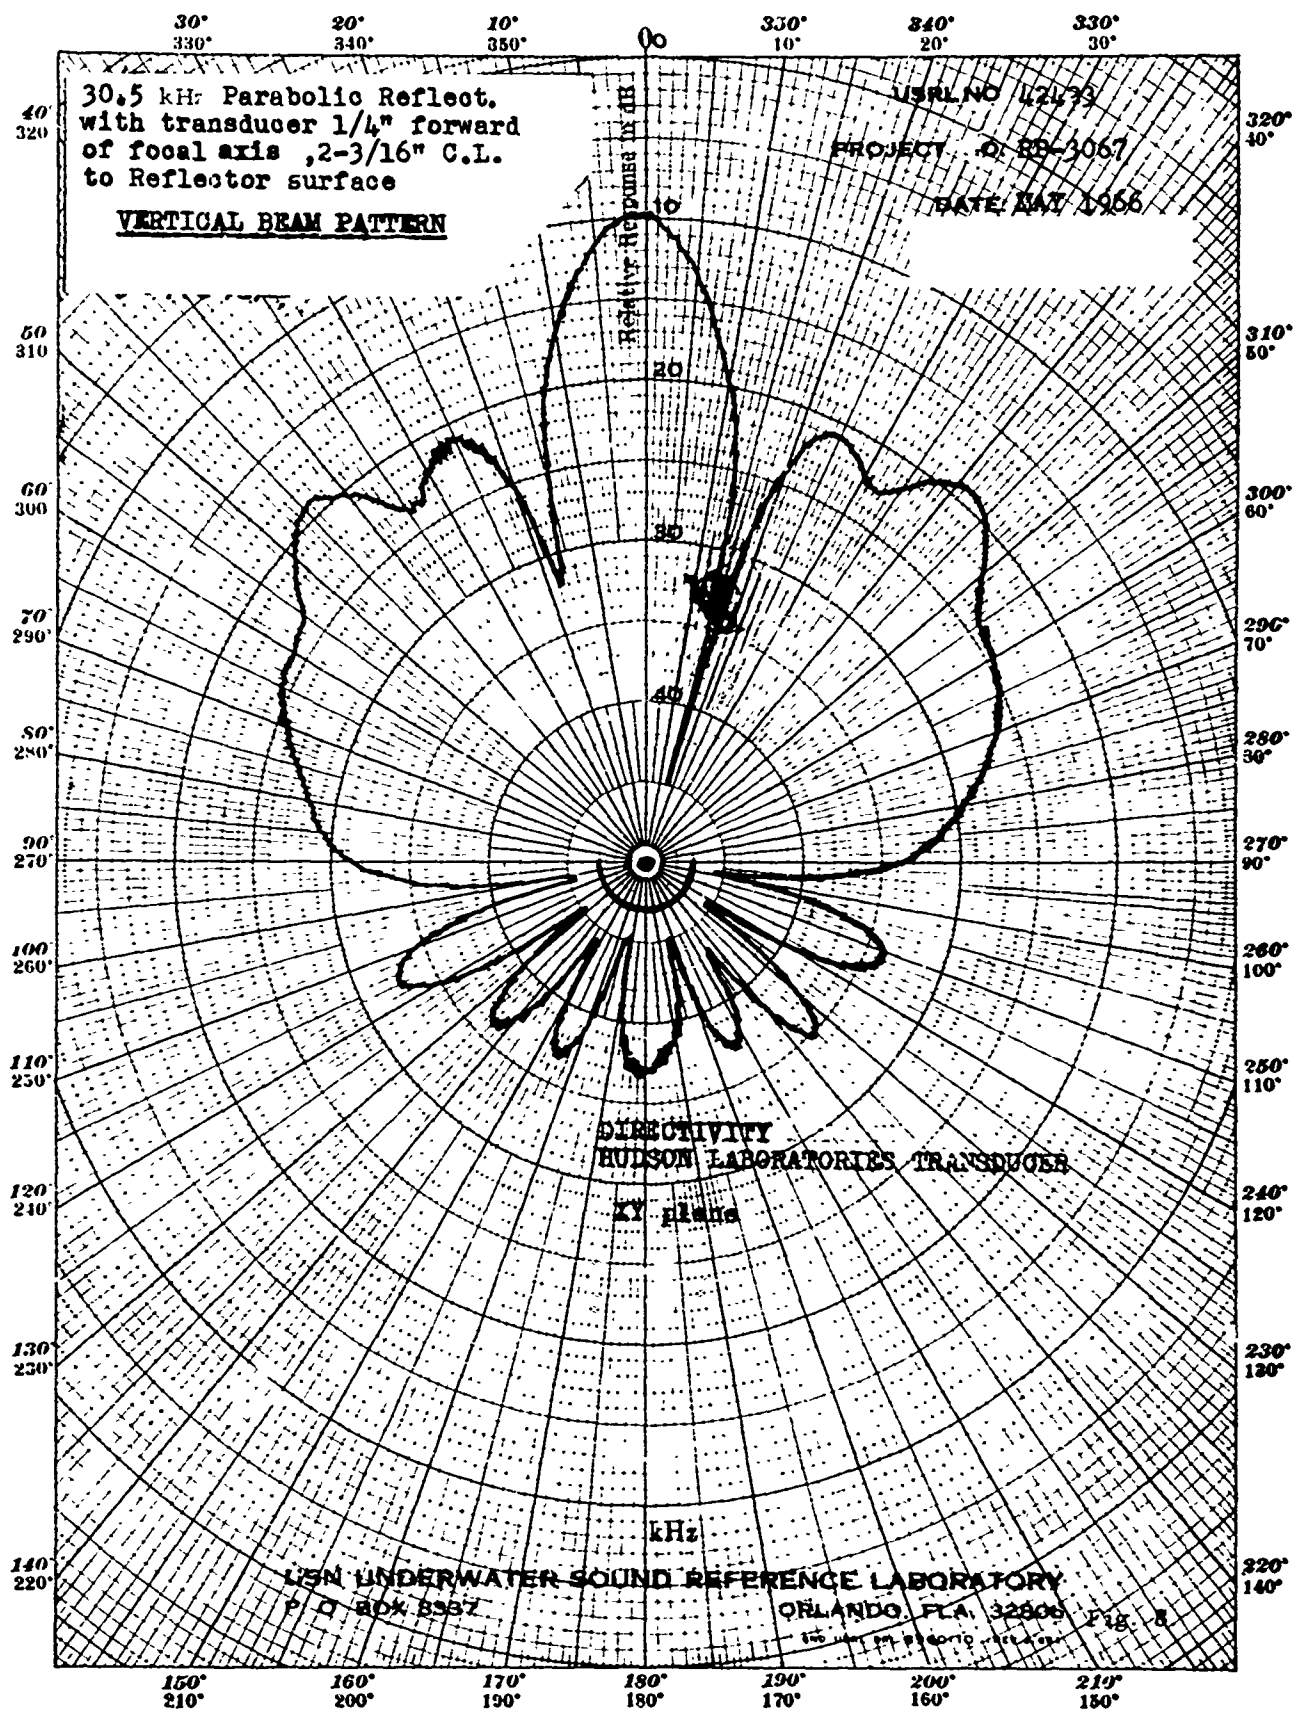

USRL 42422 (Fig. 9):

The transducer center line was located $1/2$ in. behind the focal axis of the reflector, or $1-7/16$ in. from the reflector surface. The lead reflector channel was clamped against the forward transducer surface. This pattern shows the horizontal beam pattern under these conditions. The beam width of the center lobe is about 5 degrees at the 25-dB reference line, with two adjacent major lobes. Removal of the lead reflector channel eliminates the two side lobes, but does not change the width of the main beam. This test was conducted only for the purpose of determining the effect on horizontal beam width when the lead reflector was in place. The horizontal beam width with the transducer center line on the focal axis of the reflector is 5 degrees at the 25-dB reference line with minor side lobes either side not less than 15 dB below the 10-dB main lobe reference.

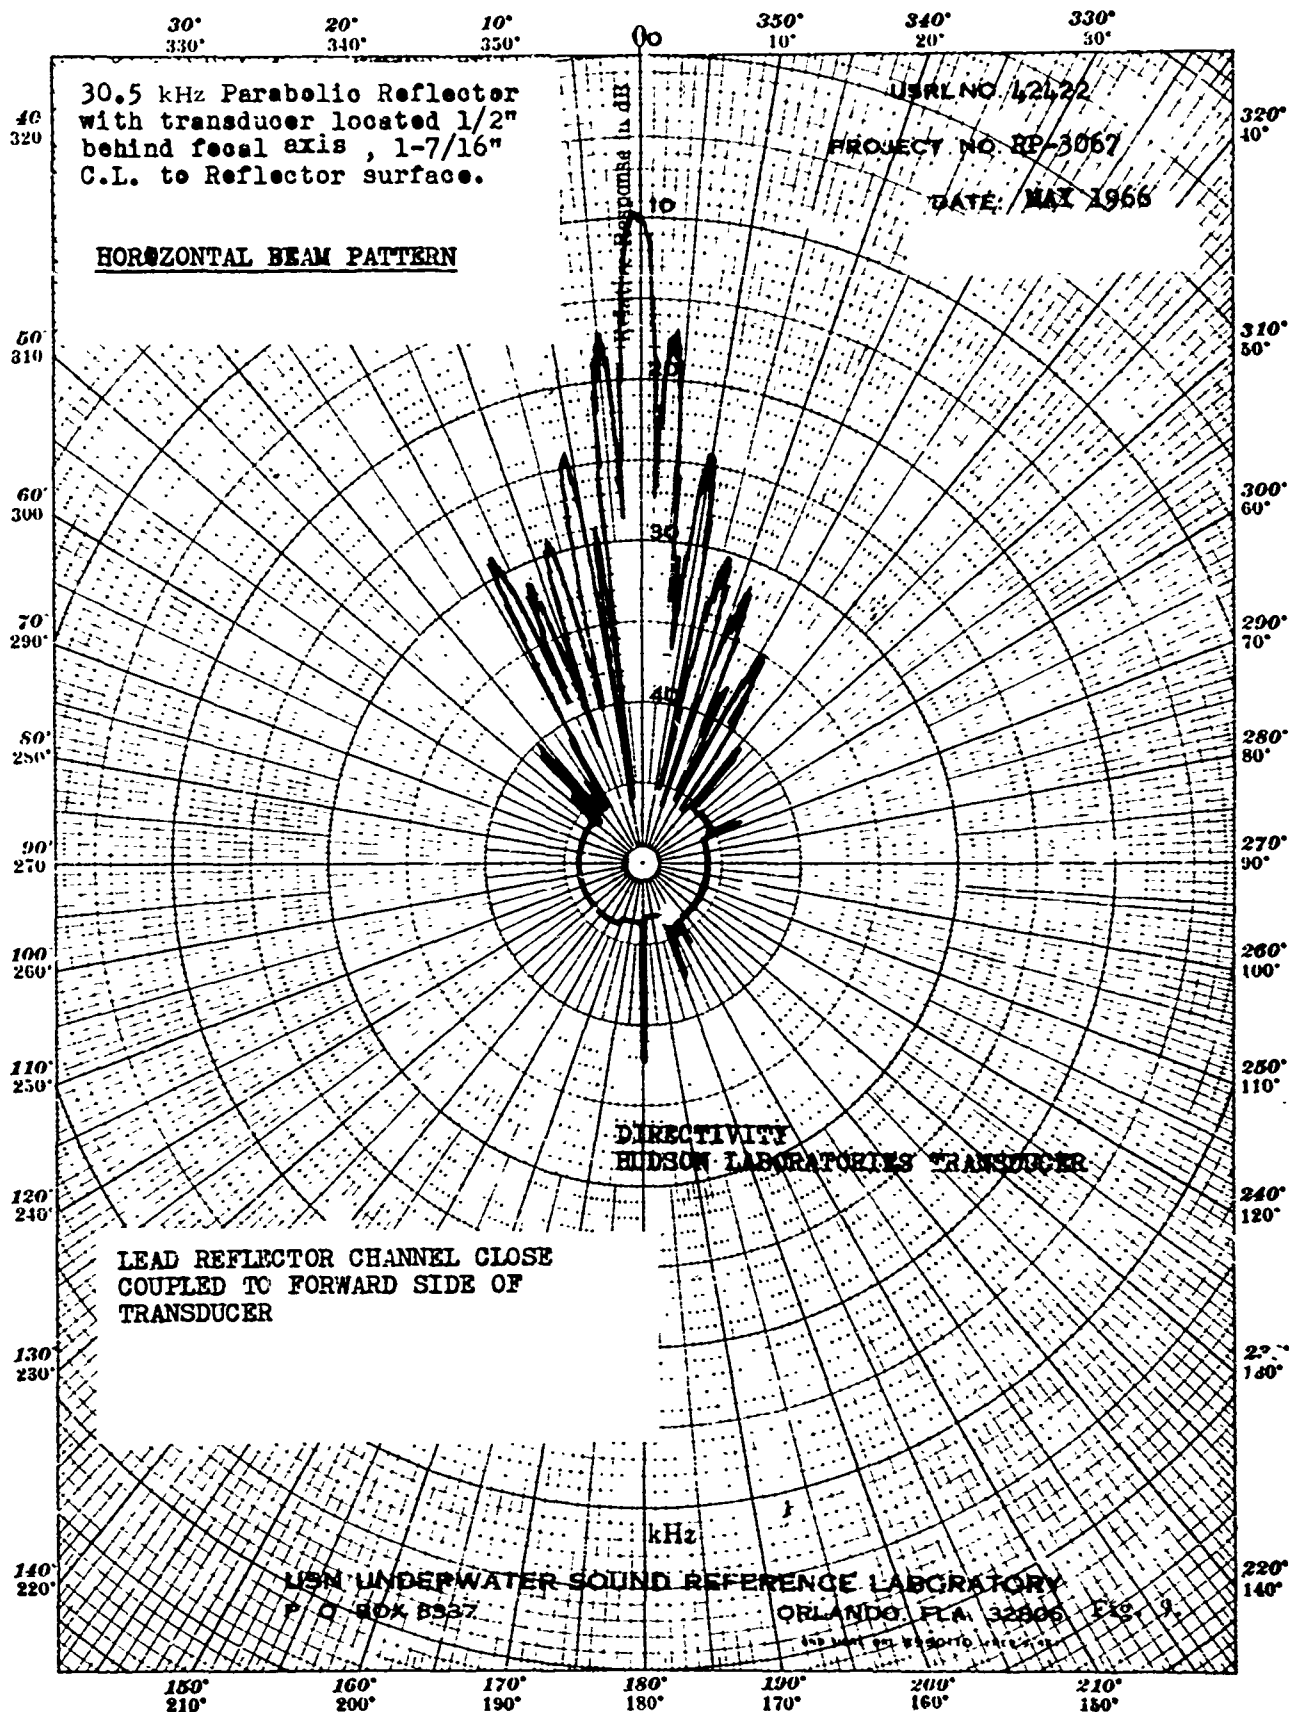

COMPARISON OF DATA TAKEN WITH CORNER AND CYLINDRICAL PARABOLIC ANTENNAS

The two photographs (Figs. 10 and 11) that follow, display records of side-scan traverses in the same area obtained on two separate occasions. In the first photograph a corner-type reflector was used in back of the transducer; in the second photograph the cylindrical parabolic reflector was used instead of the corner reflector. In Fig. 10, the event marks are at 1-min intervals; in Fig. 11 event marks indicate 5-min intervals. In both traverses peak pulse power was 100 watts and pulse length was 1 msec. Comparison of the two photographs shows that the cylindrical parabolic reflector markedly improves the detail description of the bottom as compared with the results obtained with the corner-type reflector. In the record from the parabolic reflector, shadows are more clearly shown, soft and hard areas more sharply contrasted, and boulders more clearly outlined, than in the record from the corner reflector.

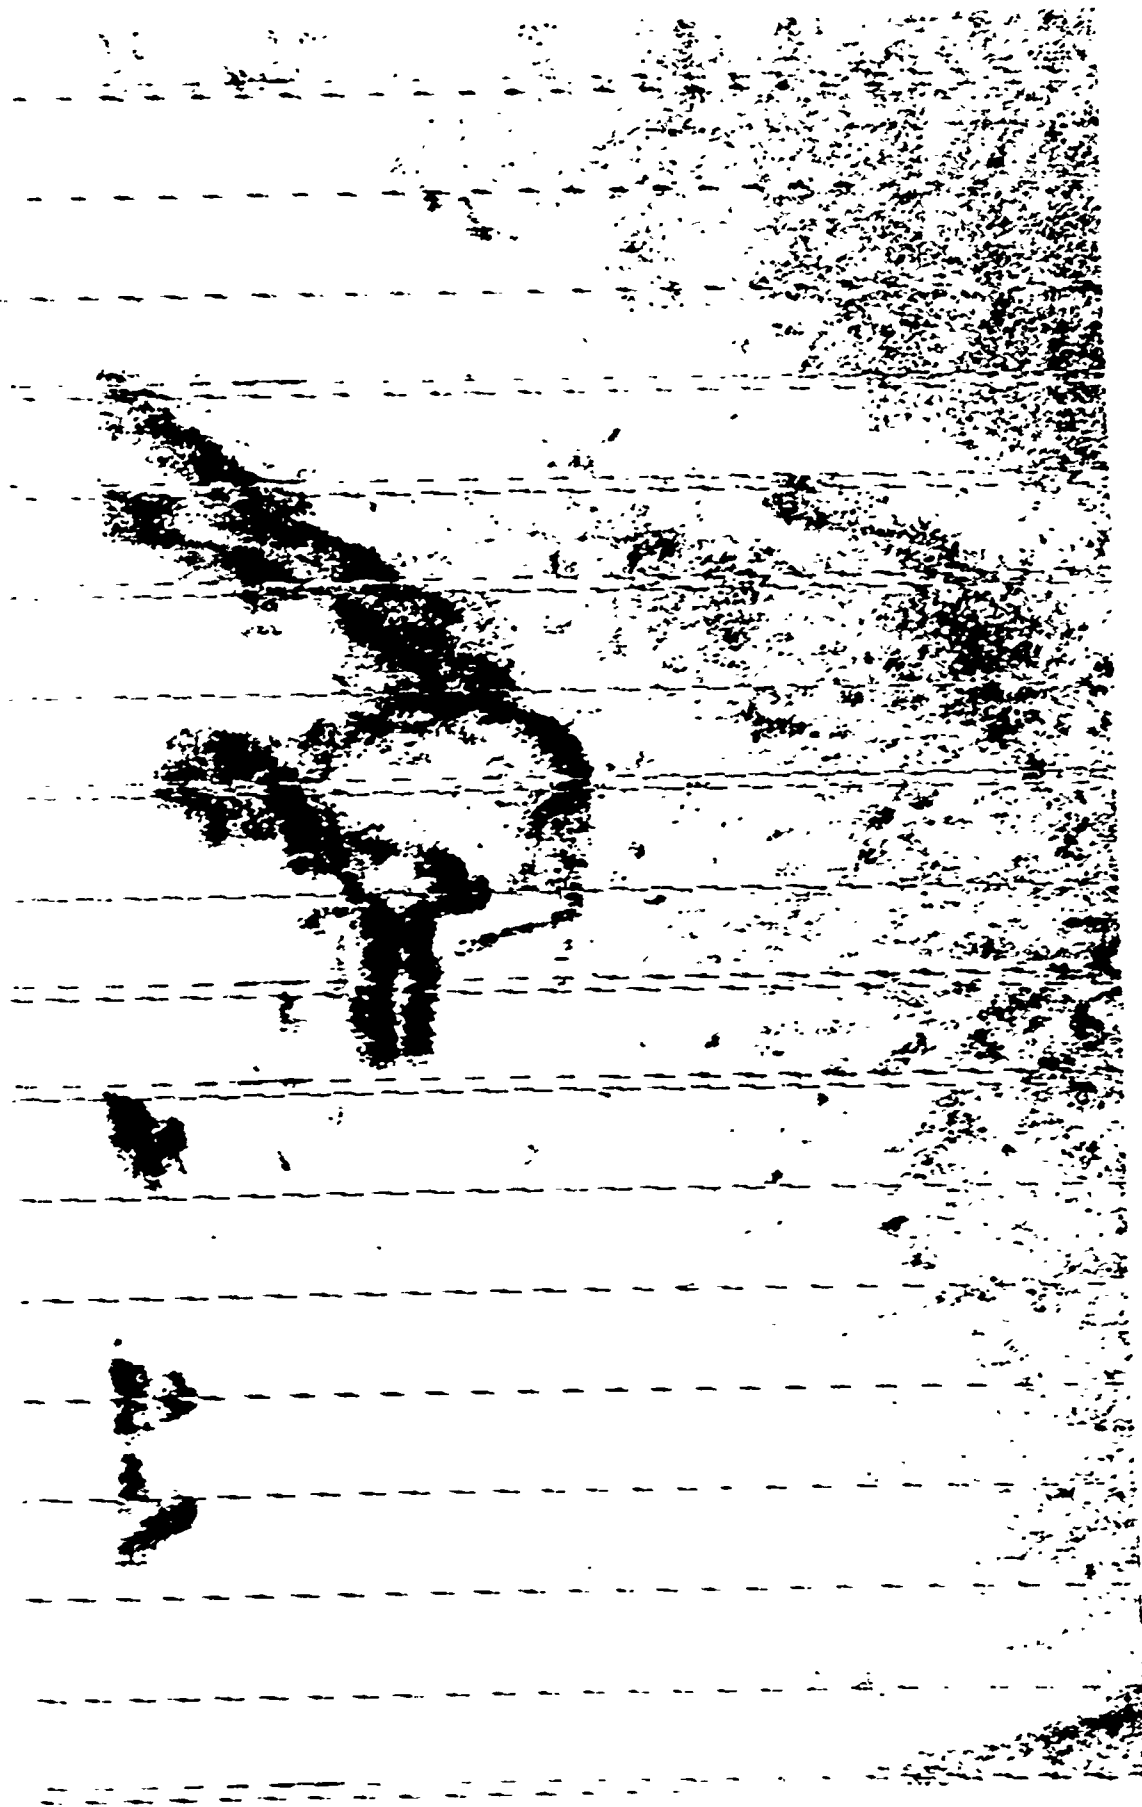


Fig. 10. PHOTOGRAPHIC RECORD; DATA TAKEN WITH CORNER-
REFLECTED TRANSDUCER



Fig. 11. PHOTOGRAPHIC RECORD; DATA TAKEN WITH CYLINDRICAL
PARABOLIC-REFLECTED TRANSDUCER


APPENDIX

Reflector Design:

Using a sound velocity of 4900 ft/sec, and frequency of 30.5 kHz, the focal axis was determined to be 1.92 in., or $1-59/64$ in. (one wavelength). The actual dimension used was $1-15/16$ in. because of the greater ease of working with this dimension. Two center lines were established at right angles to each other, both called transducer center lines. A reflector reference line, representing the closest point of the reflector to the transducer center was then drawn $1-15/16$ in. from the intersect of the transducer center lines. A second reference line, the forward reference, was then drawn located $1-15/16$ in. forward of the transducer center line intersect. This located the forward edges of the reflector. Standard parabola development was then used to derive the reflector curvature within the confines of the two reference lines (see Fig. 12).

Reflector Construction:

Because a parabola reflector does not lend itself to standard metal rolling techniques, the following method was used in its construction. The parabola curvature was traced onto a thin aluminum sheet and cut out to be used as a template. A mold was made by laminating pine boards to the necessary thickness. The mold was planed to shape using the template to check its contour, sanded smooth, and given two coats of epoxy resin to harden its outer surface. The aluminum backing plate was then rolled and pressed to near conformity with the mold. Next, the lead reflector was formed over the mold using a pine block and mallet. When the lead was

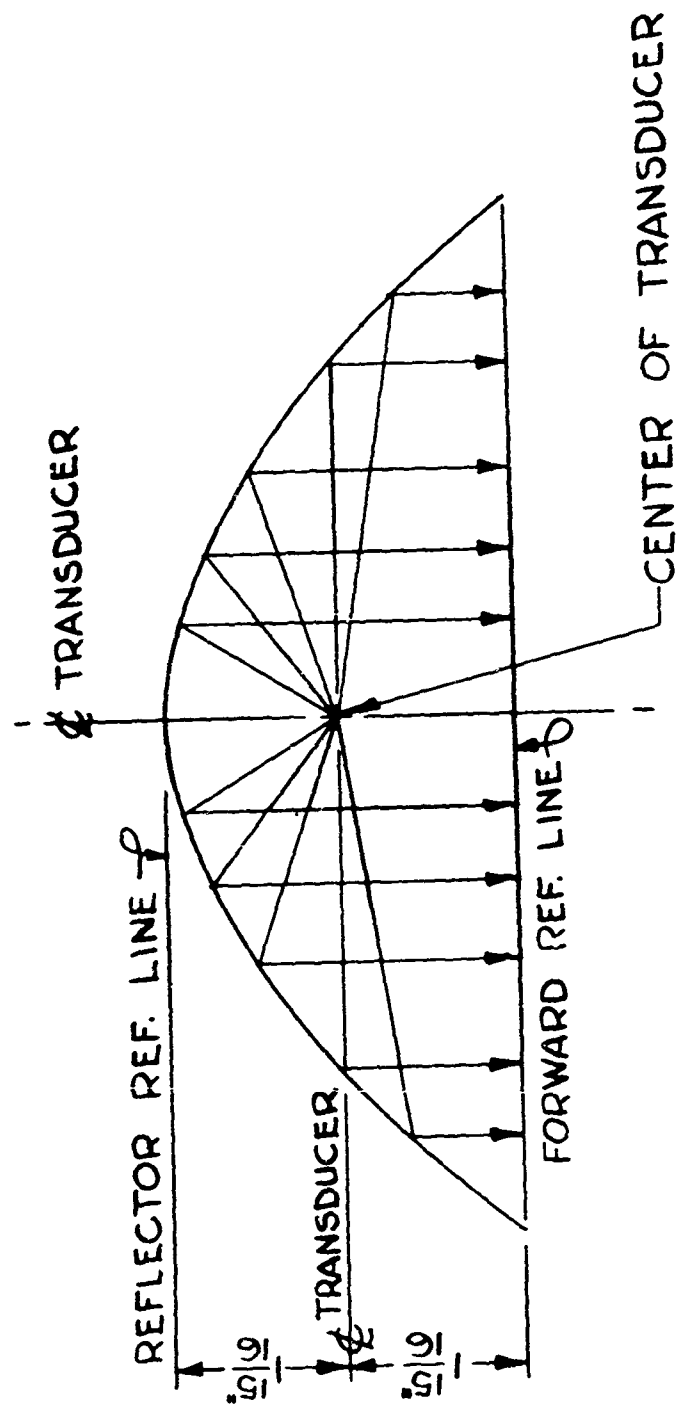


(END VIEW)

Fig. 12. PARABOLIC REFLECTOR DEVELOPMENT FOR
30.5 KHZ FOCAL AXIS AT $1\frac{5}{8}$ " (ONE WAVELENGTH)
FROM REFLECTOR

fully formed to the mold, the aluminum backing plate was cemented to it with epoxy cement. An aluminum angle was fastened to the long edges with 10-32 stainless hardware. A $3/4 \times 1/16$ in. strip of stainless steel was fastened along the curved edges with 10-32 stainless hardware. The aluminum angle acts as a stiffener, while the stainless strip provides edge protection. The focusing bracket assemblies were then located along the central reflector axis, drilled, and bolted into place. The brackets for mounting the reflector to the towing vehicle were fastened to the back of the reflector, and the entire assembly was sanded and given two coats of epoxy paint, thus completing the assembly. Figures 13 and 14 show the mold construction and details of the focusing bracket assembly. The photograph (Figure 15) shows the transducer reflector assembly.

CORNERS PLANED TO
CONTOUR INDICATED.

MATERIAL - $\frac{3}{4}$ " PINE

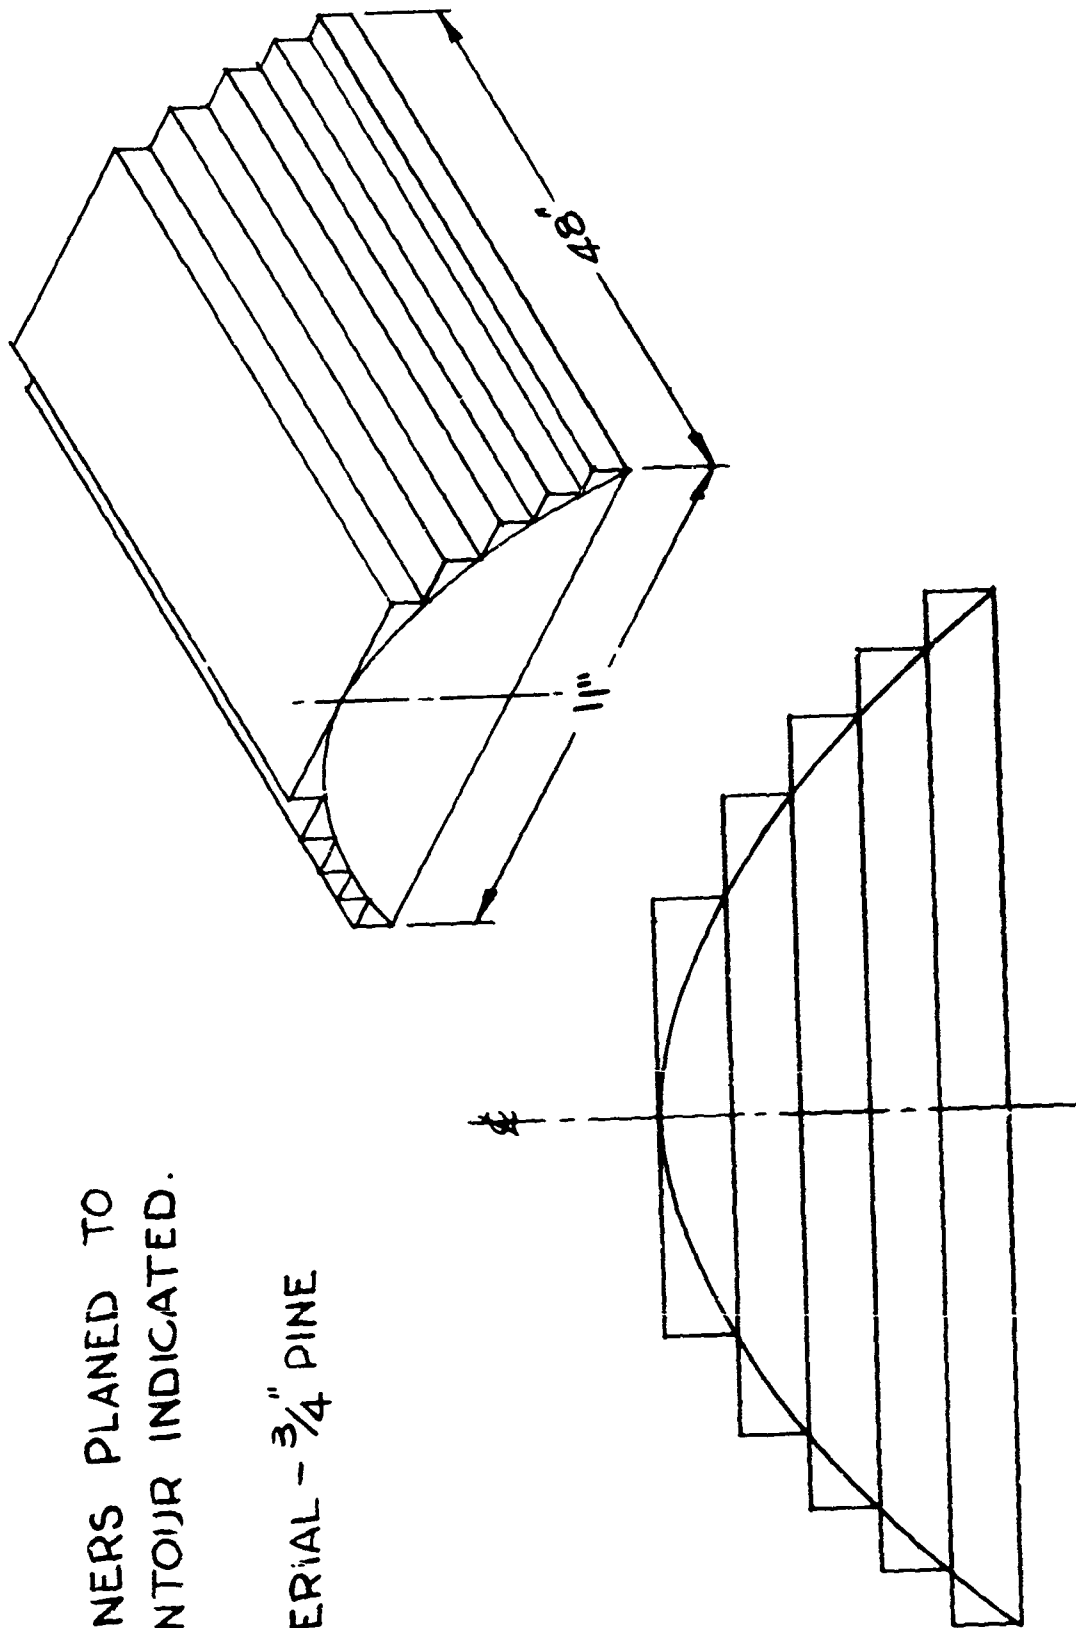

(END VIEW)
Fig. 13. MOLD FOR 30.5 kHz PARABOLIC REFLECTOR


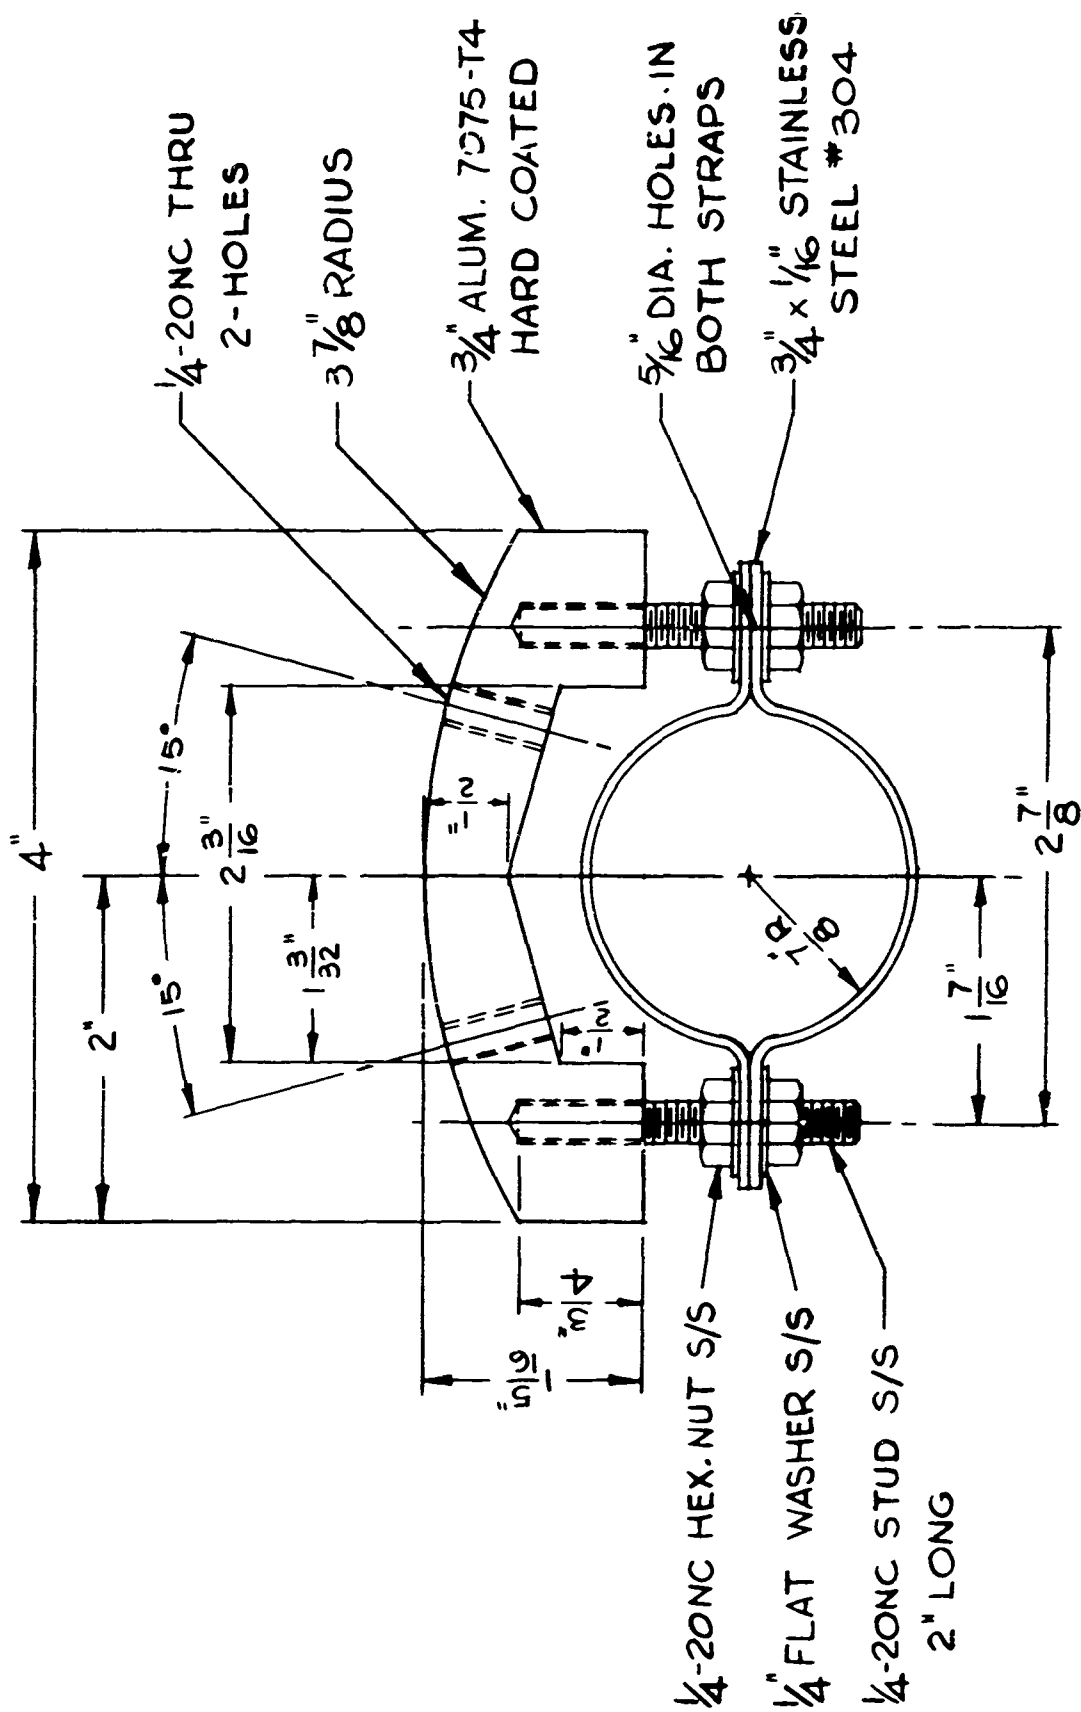


Fig. 14. FOCUSING BRACKET ASSEMBLY
FOR USE IN 30.5 kHz PARABOLIC REFLECTOR

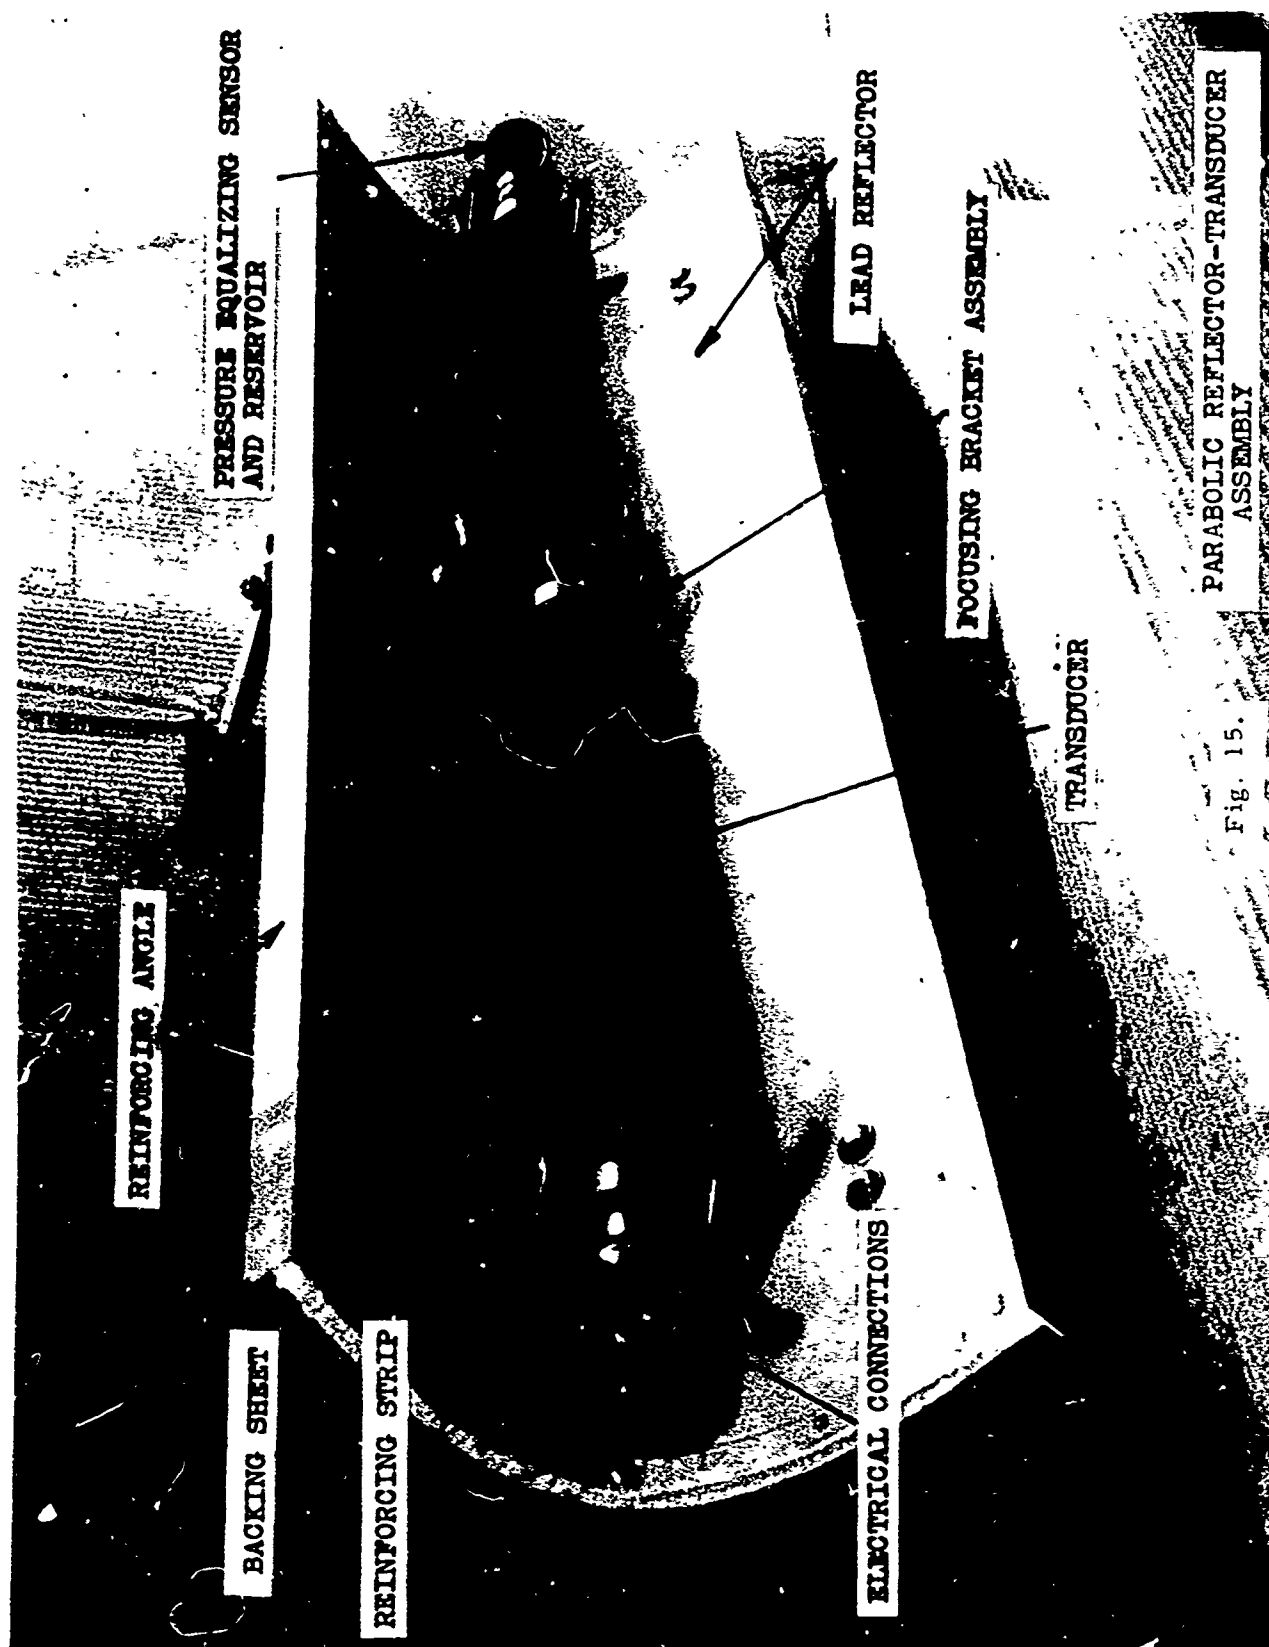

ACKNOWLEDGMENTS

Sincerest thanks are expressed to those listed below for their invaluable assistance and encouragement.

Mr. Peter E. Weber, Chief Mechanical Engineer, Hudson Laboratories, Columbia University, Dobbs Ferry, N. Y., for assistance in parabola design, and for many constructive consultations during construction phases.

Mr. Harold Dennis, Mr. Joseph Zalesak, of the staff at the U.S.N. Underwater Sound Reference Laboratory, Orlando, Florida, for a most cooperative spirit and for constructive test suggestions.

Dr. John E. Sanders, Geologist and Senior Research Associate, Hudson Laboratories, Columbia University, Dobbs Ferry, N. Y., for promoting the field usage of lateral echo sounding equipment during his investigations in the Minas Basin, Nova Scotia, Canada, and in numerous other locales.

Mr. Irving Weisman, Senior Project Engineer, Hudson Laboratories, for his assistance and consultations during the preparation of this report.

Mr. William E. Branscomb, Senior Project Engineer, Hudson Laboratories for his assistance in preparing this report, and consultations during field applications of lateral echo-sounding equipment.

Mr. George Brown, Chief Machinist, Hudson Laboratories for his assistance during the parabolic reflector fabrication stages.

Captain Paul Miller, and the crew of the R/V Manning, for assistance during many surveys conducted using the lateral echo-sounding equipment.

Commanding Officer and Director
Naval Ship Research Development
Center
Washington, D. C. 20007
copy 37

Director
Defense Documentation Center
Cameron Station
Alexandria, Virginia 22314
copies 38-57

Director
Defense Research and Engineering
Department of Defense
Washington, D. C. 20301
Asst. Dir. (Sea Warfare Systems)
copy 58

Director
Defense Research Laboratory
University of Texas
P. O. Box 8029
Austin, Texas 78712
copy 59

Commander
Destroyer Development Group Two
FPO
New York, New York 09501
copy 60

Commander
Destroyer Development Group Pacific
U. S. Naval Station
Long Beach, California 90806
copy 61

Dr. Frederick V. Hunt
222 Lyman Laboratory
Harvard University
Cambridge, Massachusetts 02138
copy 62

President
Institute for Defense Analyses
400 Army Navy Drive
Arlington, Virginia 22202
copy 63

Director
Lamont Geological Observatory
Columbia University
Palisades, New York 10964
copy 64

Director
Marine Physical Laboratory
Scripps Institution of Oceanography
University of California
San Diego, California 92152
copy 65

Director
Scripps Institution of Oceanography
Documents/Reports Section
Scripps Library
La Jolla, California 92037
copy 66

Director
National Oceanographic Data Center
Building 160
Washington Navy Yard
Washington, D. C. 20350
copy 67

Commander
Naval Air Systems Command
Department of the Navy
Washington, D. C. 20360
Code AIR 03 copy 68
Code AIR 370 copy 69
Code AIR 5330 copy 70

Commander
Naval Electronics Command
Department of the Navy
Washington, D. C. 20360
Code 03 copy 71
Code EP03 copy 72

Commander
Naval Ordnance Systems Command
Department of the Navy
Washington, D. C. 20360
Code ORD 03 copy 73
Code ORD 05 copy 74

Commander
Naval Ship Systems Command
Department of the Navy
Washington, D. C. 20360
Code SHIPS 03 copy 75
Code SHIPS 036 copy 76
Code SHIPS 0355 copy 77

Commanding Officer and Director
Naval Training Device Center
Orlando Air Force Base
Orlando, Florida 32813
copy 78

Oceanographer of the Navy
The Madison Building
732 North Washington Street
Alexandria, Virginia 22314
copy 79

Resident Representative
Office of Naval Research
Hudson Laboratories
Columbia University
145 Palisade Street
Dobbs Ferry, New York 10522
copy 80

Director
Office of Naval Research Branch Office
495 Summer Street
Boston, Massachusetts 02210
copy 81

Director
Office of Naval Research Branch Office
219 South Dearborn Street
Chicago, Illinois 60604
copy 82

Commanding Officer
Office of Naval Research Branch Office
Box 39
FPO
New York, New York 09510
copy 83

Director
Office of Naval Research Branch Office
1030 East Green Street
Pasadena, California 91101
copy 84

Director
Office of Naval Research Branch Office
San Francisco Area Office
1076 Mission Street
San Francisco, California 94103
copy 85

Office of Naval Research Representative
Bermuda
FPO
New York, New York 09560
copy 86

Commander
Operational Test & Evaluation Force
U. S. Naval Base
Norfolk, Virginia 23511
copy 87

Deputy Commander
Operational Test & Evaluation
Force Pacific
U. S. Naval Air Station North Island
San Diego, California 92135
copy 88

Director
Ordnance Research Laboratory
Pennsylvania State University
University Park, Pennsylvania 16801
copy 89

Director
SACLANT ASW Research Center
APO, New York, New York 09019
via (1)
Office of Naval Research (Code 466)
via (2)
Chief of Naval Operations (Op-92C2)
Washington, D. C. 20350
via (3)
Secretariat
State-Defense Military Information
Control Committee
Washington, D. C. 20350
copy 90

Director
Special Projects Office
Department of the Navy
Washington, D. C. 20360
Code S.20 copy 91

Commander
Submarine Development Group Two
Naval Submarine Base New London
Groton, Connecticut 06342
copy 92

Commander
Submarine Force
U. S. Atlantic Fleet
Norfolk, Virginia 23511
copy 93

Commander
Submarine Force
U. S. Pacific Fleet
FPO
San Francisco, California 96610
copy 94

Chief Scientist
Navy Underwater Sound Reference
Division
Naval Research Laboratory
P. O. Box 8337
Orlando, Florida 32806
copy 95

Commanding Officer and Director
U. S. Atlantic Fleet
ASW Tactical School
Norfolk, Virginia 23511
copy 96

Commanding Officer
U. S. Fleet ASW School
San Diego, California 92147
copy 97

Commanding Officer
U. S. Fleet Sonar School
U. S. Naval Base
Key West, Florida 33040
copy 98

Commanding Officer
U. S. Naval Air Development Center
Johnsville, Pennsylvania 18974
copy 99

Commander
U. S. Naval Oceanographic Office
Washington, D. C. 20390
Code 00 copy 100
Code 1640, Library copies 101-102

Commander
U. S. Naval Ordnance Laboratory
White Oak
Silver Spring, Maryland 20910
copies 103-104

Commander
Naval Weapons Center
China Lake, California 93555
copy 105

Officer in Charge
Naval Undersea Warfare
Center
3202 East Foothill Boulevard
Pasadena, California 91107
copy 106

Superintendent
U. S. Naval Postgraduate School
Monterey, California 93940
Attn: Librarian
copy 107

Director
U. S. Naval Research Laboratory
Washington, D. C. 20390
Code 2027 copies 108-113
Code 5500 copy 114

Commanding Officer and Director
U. S. Naval Underwater Weapons
Research and Engineering Station
Newport, Rhode Island 02844
copy 115

Commander
Naval Electronics Laboratory Center
for Command Control and
Communications
271 Catalina Boulevard
San Diego, California 92152
copies 116-117

Commanding Officer and Director
U. S. Navy Mine Defense Laboratory
Panama City, Florida 32402
copy 118

Commanding Officer and Director
U. S. Navy Underwater Sound
Laboratory
Fort Trumbull
New London, Connecticut 06321
copies 119-120

Director
Weapons Systems Evaluation Group
Department of Defense
Washington, D. C. 20350
copy 121

Director
Woods Hole Oceanographic Institution
Woods Hole, Massachusetts 02543
copy 122

August 1968

UNCLASSIFIED

Security Classification

DOCUMENT CONTROL DATA - R & D		
Security Classification of title, body of abstract and indexing annotation must be entered when the overall report is classified		
1. ORIGINATING ACTIVITY (Corporate author) Hudson Laboratories of Columbia University 145 Palisade Street Dobbs Ferry, New York 10522		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED
		2b. GROUP N/A
3. REPORT TITLE A CYLINDRICAL PARABOLIC REFLECTOR FOR USE WITH PIEZOELECTRIC CYLINDRICAL TRANSDUCERS, AS APPLIED TO LATERAL ECHO UNDERWATER SURVEY		
4. DESCRIPTIVE NOTES (Type of report and, inclusive dates) Technical Report		
5. AUTHOR(S) (First name, middle initial, last name) F. W. Cole		
6. REPORT DATE January 1968	7a. TOTAL NO. OF PAGES 37	7b. NO. OF REFS 2
8a. CONTRACT OR GRANT NO. Nonr-266(84)	9a. ORIGINATOR'S REPORT NUMBER(S) Technical Report No. 154	
b. PROJECT NO.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c.		
d.		
10. DISTRIBUTION STATEMENT Document cleared for public release and sale; its distribution is unlimited.		
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY Office of Naval Research, Code 466
13. ABSTRACT A parabolic lead reflector designed for creating a narrow sound beam at an underwater frequency of 30.5 kHz from an array of cylindrical ceramic piezoelectric crystals is described. The reflector consists of sheet lead 1/4-in. thick, backed by an aluminum stiffener sheet, 1/8-in. thick. Brackets for supporting the cylindrical crystal assembly are positioned at three points along the focal axis of the reflector. Clamping brackets for holding the cylindrical transducer are used to secure the transducer to the mounting brackets along the reflector axis. Spacers of predetermined lengths are used to position the clamping brackets closer to or further away from the mounting brackets in the reflector. In this way, the vertical beam width can be varied to a considerable degree by shifting the transducer inside, at, or forward of the reflector focal axis. The cylindrical transducer assembly consists of 18 ceramic, lead zirconate cylinders, 1-1/2 in. O. D. and 2-1/2 in. long. The cylinders are cemented end to end to form a single, long, cylinder transducer. The transducer is then enclosed in a snug-fitting, tubular rubber sleeve that has an attached rubber oil reservoir. The entire assembly is evacuated and then filled with oil that has been previously evacuated to remove air contamination. The oil reservoir maintains pressure balance in the transducer as the transducer is raised or lowered or varies in depth during submerged towing.		

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Underwater parabolic reflector						